

NEW YORK UNIVERSITY

INSTITUTE OF MATHEMATICAL SCIENCES  
LIBRARY

25 Waverly Place, New York 3, N. Y.

AFCRC-TN-59-138

ASTIA DOCUMENT NO. AD 211521

NOV 18 1959



**NEW YORK UNIVERSITY**

Institute of Mathematical Sciences

Division of Electromagnetic Research

RESEARCH REPORT No. EM-126

# Higher Order Approximations in Multiple Scattering

## I. Two-Dimensional Scalar Case

## II. Three-Dimensional Scalar Case

**NORMAN ZITRON and SAMUEL N. KARP**

Contract No. AF 19(604)1717

MARCH, 1959

EM-126  
61




NEW YORK UNIVERSITY  
Institute of Mathematical Sciences  
Division of Electromagnetic Research

Research Report No. EM-126


Higher Order Approximations in Multiple Scattering

- I. Two-Dimensional Scalar Case
- II. Three-Dimensional Scalar Case

Norman Zitron and Samuel N. Karp

  
Norman Zitron

  
Samuel N. Karp

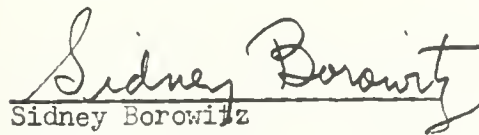  
Sidney Borowitz  
Acting Director

  
Dr. Werner Gerbes  
Contract Monitor

The research reported in this document has been sponsored by the Electronics Research Directorate of the Air Force Cambridge Research Center, Air Research and Development Command. The publication of this report does not necessarily constitute approval by the Air Force of the findings or conclusions contained herein.

Contract No. AF 19(604)1717

March, 1959

Requests for additional copies by Agencies of the Department of Defense,  
their contractors, and other Government agencies should be directed to the:

ARMED SERVICES TECHNICAL INFORMATION AGENCY  
DOCUMENTS SERVICE CENTER  
ARLINGTON HALL STATION  
ARLINGTON 12, VIRGINIA

Department of Defense contractors must be established for ASTIA services  
or have their 'need-to-know' certified by the cognizant military agency  
of their project or contract.

All other persons and organizations should apply to the:

U.S. DEPARTMENT OF COMMERCE  
OFFICE OF TECHNICAL SERVICES  
WASHINGTON 25, D.C.

# Abstract

- I. A formula is derived which expresses the perturbed scattering amplitudes of a combination of two arbitrary cylinders as a function of the unperturbed scattering amplitudes of the individual cylinders. The formula is valid when the spacing of the scatterers is large compared to their dimensions. It involves derivatives of the scattering amplitudes with respect to the angles of incidence and of observation. Interaction terms of degrees  $d^{-1/2}$ ,  $d^{-1}$ , and  $d^{-3/2}$  are taken into account, where  $d$  is the spacing. Verification is obtained in a special case. The result is employed to calculate the total scattering cross section.
- II. The method of I is extended to cover the three dimensional scalar problem for two bodies of arbitrary shape. All interaction terms of order  $d^{-1}$  and  $d^{-2}$  are given.

## Table of Contents

	<u>Page</u>
I. Two Dimensional Case	1
1. Introduction	1
2. A statement of the problem, and of the method of analysis	3
3. Expansion of the scattered wave in terms of plane waves	6
A. Expansion of the response of cylinder A in a neighborhood of cylinder B	6
B. Expansion in a neighborhood of A for the wave scattered by B	10
C. Expression of the scattered waves in terms of plane waves	10
D. Elimination of $f_1$	12
4. Calculation of the interaction	13
5. A special case. Scattering by two conduction circular cylinders	18
6. An explanation of the result	24
7. The total scattering cross section of a combination of two identical circular cylinders	26
8. Additional remarks	28
II. Three Dimensional Case	30
1. Statement of the problem	30
2. Expansion of the scattered wave in terms of plane waves	33
3. Calculation of the perturbed far field amplitude	37
4. Explanation of the result	39
References	41



## I. Two Dimensional Case

### 1. Introduction

The present paper deals with the diffraction of plane electromagnetic or acoustic waves by a pair of parallel cylinders of arbitrary shape. The diffraction by each cylinder, in isolation, is assumed known, and the diffraction by the configuration is calculated explicitly, in terms of these data. An approximation is involved which will be described below.

The question of multiple scattering has already been treated, but in less detail, by a number of writers. A brief sketch of the history of the problem follows, with emphasis on those treatments of the problem whose accuracy increases with the spacing. We recall Reiche and Schafer<sup>[1]</sup>, who were the first to have given a wave theoretical discussion of the finite grating of circular cylinders. These authors neglected the interaction between the cylinders; their work was therefore valid, in principle, in the limit of large spacing. A very general expression for the diffraction by an arbitrary assemblage of circular cylinders was given by Twersky<sup>[2]</sup>, who took all orders of interaction into account. The method depended heavily upon the separability of the circular geometry, and the most general form of the result was too complicated to be discussed. However, Twersky found that, if he proceeded to the limit of large spacing, he could simplify his result immensely and achieve a perspicuous discussion of the correction to single scattering. This work gave a correct account of terms of degree  $d^{-1/2}$  and  $d^{-1}$  in the spacing.

This success led to a general investigation of the large spacing approximation by Karp<sup>[3]</sup>, who showed that for cylinders of arbitrary shape, the leading terms of the interaction correction could themselves

be expressed explicitly in terms of non-interaction or single scattering results, the latter being regarded as given. In fact the interaction term could be regarded as being composed of the response of each cylinder to a plane wave arriving from the direction of the other cylinders. The techniques of [4] were exploited by Karp and Radlow\* in the analysis of a grating of cylinders. Similar methods were used by Karp and Russek [6] in expressing the approximate solution to the problem of diffraction by a wide slit in terms of the well known solution for the half plane problem.

The purpose of the present paper is to extend the work of Karp [3] so as to take into account higher order terms. Just as in [3], the cylinders are arbitrary, and the scattering by each cylinder in isolation is assumed as given. But, it is found\*\* that even the higher order correction terms can be calculated generally, simply and explicitly in terms of the single scattering data used in [3] for calculation of the leading terms. This is the principal result of the present paper.

The general calculation was carried out so as to include all effects of order of magnitude  $d^{-1/2}$ ,  $d^{-1}$  and  $d^{-3/2}$ , where  $d$  is the spacing of the cylinders. For purposes of comparison, Twersky's calculation for a pair of circular cylinders was continued so as to include terms of order  $d^{-3/2}$ ; this special calculation by the repeated application of addition theorems was then shown to agree with the general result of the present work, when the latter result is specialized to the case of circular cylinders. The result is used to calculate the total cross section for a pair of circular cylinders as a function of the spacing and the known unperturbed (or non-interaction) scattering amplitude functions.

---

\*See also [5]

\*\*Cf. [7]



## 2. A Statement of the Problem, and of the Method of Analysis.

We would like to know the scattering pattern of a combination of two infinite parallel cylinders in terms of the scattering patterns which these cylinders would have if they were isolated from each other. In other words, we want to obtain a functional relationship between the unperturbed and the perturbed scattering patterns of the cylinders. Such a relation is desirable because it simplifies the calculation of the pattern for the combination. If we can calculate the unperturbed patterns, we need only insert them in this relation to obtain the perturbed patterns. The relation is useful, moreover, even if the shapes of the cylinders are so complicated that we cannot separate variables or if calculation by separation of variables is too tedious\*. Also in such cases, the unperturbed patterns might be measured experimentally for all angles of observation and these unperturbed patterns might then be substituted into the relation obtained here to yield the perturbed patterns.

The situation is the following: A plane wave of unit amplitude is incident upon the two parallel cylinders A and B (Figure 1).

LEFT CYLINDER A

RIGHT CYLINDER B

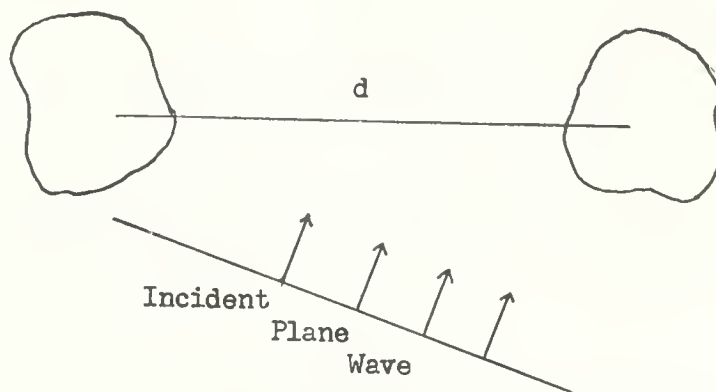


FIGURE 1

---

\*See [4] for the use of an even less accurate relation for theoretical purposes.

To avoid ambiguity in the definition of the spacing  $d$ , we define a coordinate system for each cylinder. Let  $A'$  and  $B'$  be circular cylinders circumscribed about  $A$  and  $B$  respectively. Let  $a$  and  $b$  be the respective radii of  $A'$  and  $B'$ . We shall let  $Z_a$  be the axis of  $A'$  and  $Z_b$  be the axis of  $B'$ . The problem is two-dimensional, and we shall operate in a plane perpendicular to the  $Z$  axes. The respective intersections of this plane with the  $Z_a$  and  $Z_b$  axes will then be the origins of the coordinate systems of  $A$  and  $B$ . We can now define the spacing  $d$  as the distance between the axes of  $A'$  and  $B'$  - that is, the distance between the two origins (Figure 2).

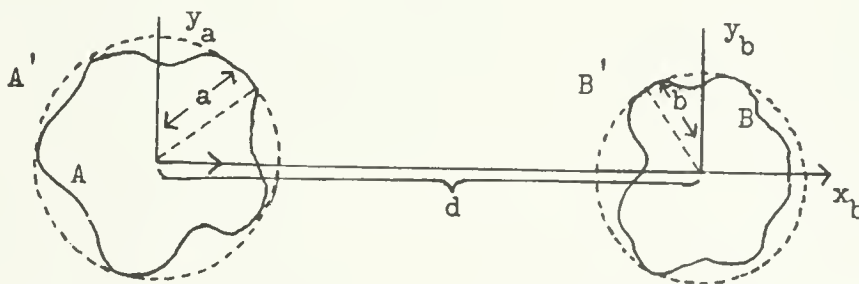


FIGURE 2

We make the following assumptions:

- 1) The individual complex scattering pattern is known when each cylinder stands alone in space.
- 2)  $d \gg \lambda$  where  $\lambda$  is the wave length of the incident wave.\*
- 3)  $d \gg a$  and  $d \gg b$ .

---

\*Numerical calculation in [5], which are based on a less accurate procedure, showed that  $d$  could be as small as one wavelength without impairing the accuracy materially. The present result would therefore allow an even smaller spacing, provided the cylinders are kept sufficiently small compared to the spacing.

Our object is to find a functional relation between the scattering pattern of the combination and those of the isolated component cylinders. This cannot be accomplished by simple superposition of the unperturbed patterns of the components since the individual pattern of each component cylinder is modified by the field scattered by the other cylinder. We must, therefore, consider the interaction.

We shall assume that the response  $U_s$  of each cylinder to a plane wave is of the form

$$(1) \quad U_s = \frac{e^{ikr}}{\sqrt{r}} \sum_{n=0}^{\infty} \frac{f_n(\theta, \theta_0)}{r^n} \quad \text{for large } r$$

where  $r$  is the distance from the axis of the circumscribed circular cylinder,  $\theta$  is the angle of observation, and  $\theta_0$  is the angle of incidence. Both  $\theta$  and  $\theta_0$  are measured from the  $x$  axis of each cylinder. The  $x$  axes are collinear with  $d$ .

As will be explained below, at a sufficiently large distance from the cylinder, the scattered field  $U_s$  resembles a plane wave. This approximate plane wave elicits a response from the other cylinder, perturbing its scattered field. This response also has the form (1) and in turn perturbs the field scattered by the first cylinder. We can carry out successive calculations for this process until the desired order of accuracy is obtained. When the perturbed patterns have been calculated, they can be superposed.

We shall deal, in this paper, with interaction terms of degrees  $d^{-1/2}$ ,  $d^{-1}$  and  $d^{-3/2}$ . The procedure involves a new kind of expansion of

the waves scattered by each cylinder about the origin located in the other cylinder. In order to insure that all terms up to order  $d^{-3/2}$  are contained in the result, we must include them in the first expansion. We then find that the field scattered by a given cylinder can be represented, in the neighborhood of the other cylinder, as a plane wave, plus additional terms which are recognized as derivatives of a plane wave with respect to its angle of incidence. The simple way of expressing the higher order excitations is what enables us to calculate the higher order responses conveniently.

### 3. Expansion of the scattered waves in terms of plane waves.

#### A. Expansion of the response of cylinder A in a neighborhood of cylinder B.




FIGURE 3

Let us consider what happens when a plane wave is incident upon A. The wave function for a plane wave is (Figure 3).

$$(2) \quad U_1 = e^{ik(x_a \cos \theta_0 + y_a \sin \theta_0)}$$

The wave scattered by A in response to the plane wave is represented by an asymptotic solution of the reduced wave equation.

$$(3) \text{ D.E.} \quad (\Delta + k^2) U = 0 .$$

The boundary conditions are such that the diffraction problem for each cylinder, and for the combination, is well posed. They may be, for example,

$$(4) \text{ B.C.} \quad \left\{ \begin{array}{l} \text{a) } U = 0 \\ \text{or b) } \frac{\partial U}{\partial n} = 0 \\ \text{or c) } CU + D \frac{\partial U}{\partial n} = 0 \end{array} \right.$$

where  $\frac{\partial U}{\partial n}$  is the normal derivative of  $U$  and  $C$  and  $D$  are constants.

Alternatively, one or both of the cylinders may be filled with dielectric materials.

The radiation condition for an outgoing wave i.e.;

$$(5) \quad \lim_{r \rightarrow \infty} r^{1/2} \left[ \frac{\partial U}{\partial r} - ikU \right] = 0$$

is imposed on all scattered fields which occur.

The solution of (3) has the form

$$(6) \quad U = U_i + U_a$$

where  $U_i$  is the incident field and  $U_a$  is the field scattered by cylinder A.

We assume that  $U_a$  may be represented in the asymptotic form

$$(7) \quad U_a = \frac{e^{ikr_a}}{\sqrt{r_a}} \left[ f_0^{a_0}(\theta_a, \theta_0) + \frac{f_1^{a_0}}{r_a}(\theta_a, \theta_0) + O(r_a^{-2}) \right] .$$

The letter "a" signifies that the variable in question refers to cylinder A, and the superscript "a" signifies that the pattern is unperturbed.

If, as we have assumed, B is sufficiently small in relation to its distance from A, then the wave scattered by A is practically a plane wave in the neighborhood of B, and we may imagine such a wave incident on B. We can demonstrate an explicit representation of this approximately plane wave by expanding  $U_a$  in a neighborhood of B. We shall express the expansion in powers of  $d^{-1/2}$  in a rectangular coordinate system with origin at the center of  $B'$  and carry out the calculation up to order  $d^{-3/2}$ . The calculation proceeds as follows:

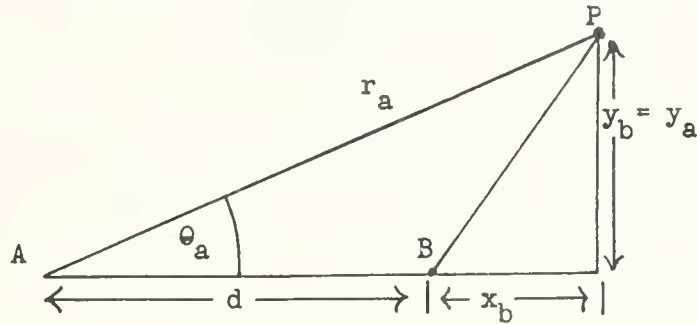


FIGURE 4

Let P be a point in the neighborhood of B. (Figure 4). Let  $r$  = the distance from the axis of  $A'$  to P. We see from Figure 4 that  $r_a = \sqrt{(d+x_b)^2 + y_b^2}$  and we shall henceforth omit the subscripts "a" and "b" as a matter of convenience. Then

$$(8) \quad e^{ikr} = e^{ik(d+x)} \left[ 1 + \frac{iky^2}{2d} + \frac{ikxy^2 - 1/4 k^2 y^4}{d^2} + O(d^{-3}) \right]$$

$$(9) \quad r^{-1/2} = (d^2 + 2xd + x^2 + y^2)^{-1/4} = \frac{1}{d^{1/2}} - \frac{x}{2d^{3/2}} + O(d^{-5/2})$$

$$(10) \quad r^{-3/2} = d^{-3/2} \left( 1 - \frac{3}{2} \frac{x}{d} + O(d^{-2}) \right) = \frac{1}{d^{3/2}} + O(d^{-5/2})$$

$$(10a) \quad \theta - \theta_0 = \arctan \frac{y}{d+x} = \frac{y}{d} - \frac{xy}{d^2} + \mathcal{O}(d^{-3})$$

$$(10b) \quad f_n^{ao}(\theta, \theta_0) = f_n^{ao}(0, \theta_0) + \left[ D_\theta f_n^{ao}(0, \theta_0) \right] \theta + \left[ D_\theta^2 f_n^{ao}(0, \theta_0) \right] \frac{\theta^2}{2} + \dots,$$

where  $D_\theta \equiv \frac{\partial}{\partial \theta}$ . Using (10a), we can rewrite (10b) in the form

$$(11) \quad f_n^{ao}(\theta, \theta_0) = f_n^{ao}(0, \theta_0) + \left[ D_\theta f_n^{ao}(0, \theta_0) \right] \frac{y}{d} - \left[ D_\theta f_n^{ao}(0, \theta_0) \right] \frac{xy}{d^2} + \left[ D_\theta^2 f_n^{ao}(0, \theta_0) \right] \frac{y^2}{2d^2} + \mathcal{O}(d^{-3})$$

Substituting (8) - (11) into (7), we obtain

$$(12) \quad \begin{aligned} U_a^o = e^{ik(d+x)} & \left[ 1 + \frac{iky^2}{2d} + \frac{iky^2 - 1/4 k^2 y^4}{d^2} + \mathcal{O}(d^{-3}) \right] \\ & \left\{ \left[ \frac{1}{d^{1/2}} - \frac{x}{2d^{3/2}} + \mathcal{O}(d^{-5/2}) \right] \right. \\ & \left. \left[ f_o^{ao}(0, \theta_0) + D_\theta f_o^{ao}(0, \theta_0) \frac{y}{d} + \mathcal{O}(d^{-2}) \right] \right. \\ & \left. + \frac{1}{d^{3/2}} \left[ f_1^{ao}(0, \theta_0) + \mathcal{O}(d^{-1}) \right] \right\} \\ U_a^o = e^{ik(d+x)} & \left[ \frac{f_o^{ao}(0, \theta_0)}{d^{1/2}} \right. \\ & \left. + \frac{1/2(-x + iky^2) f_o^{ao}(0, \theta_0) + y D_\theta f_o^{ao}(0, \theta_0) + f_1^{ao}(0, \theta_0)}{d^{3/2}} + \mathcal{O}(d^{-5/2}) \right] \end{aligned}$$

We have thus obtained the field scattered by A as it appears in a neighborhood of B. We must now carry out the corresponding expansion for



the field initially scattered by B. Note that the leading term of (12) is a plane wave, i.e., a constant multiple of  $e^{ikx}$ , as we explained earlier.

### B. Expansion in a neighborhood of A for the wave scattered by B.

The same type of procedure as that used above gives us the expansion in a neighborhood of A of the wave initially scattered by B. The expression here corresponding to (12) is:

$$(13) \quad U_b^o = e^{ik(d-x)} \left[ \frac{f_o^{bo}(\pi, \theta_o)}{d^{1/2}} + \frac{1/2(x +iky^2) f_o^{bo}(\pi, \theta_o) - yD_\theta f_o^{bo}(\pi, \theta_o) + f_1^{bo}(\pi, \theta_o)}{d^{3/2}} + O(d^{-5/2}) \right]$$

The unperturbed fields scattered by either cylinder, (12) or (13), are the excitations of the other cylinder. We assumed, to begin with, that we knew the unperturbed response of each cylinder to a plane wave excitation for all angles of incidence. If (12) and (13) were plane waves, we could calculate the responses for the second scattering.\* (12) and (13), however, are not plane waves. But this impediment does not prevent the calculation of the effect of further scattering. The reason is that (12) and (13) may be represented in terms of plane waves by appropriate substitutions. This representation, which will enable us to calculate successive scattering, will now be given.

### C. Expression of the scattered waves in terms of plane waves.

We can reduce the further scattering of singly scattered waves to the scattering of plane waves by expressing (12) and (13) in terms of

---

\*This would be the method used in [3].



plane waves and derivatives of plane waves. Noting that a plane wave is represented by

$$(14) \quad v(\theta_0) = e^{ik(x \cos \theta_0 + y \sin \theta_0)}$$

we observe that

$$(15) \quad ikye^{ikx} = v_{\theta_0}(0)$$

$$(16) \quad -ikye^{-ikx} = v_{\theta_0}(\pi)$$

$$(17) \quad ik(-x+iky^2)e^{ikx} = v_{\theta_0\theta_0}(0)$$

$$(18) \quad ik(x+iky^2)e^{-ikx} = v_{\theta_0\theta_0}(\pi)$$

Substitution of (15) and (17) in (12) and of (16) and (18) in (13) yields the following representation of the scattered fields in terms of plane waves:

$$(19) \quad U_a^o = e^{ikd} \left[ \frac{v(0)f_o^{ao}(0,\theta_0)}{d^{1/2}} + \frac{\frac{1}{2ik} [D_{\theta_0}^2 v(0)] f_o^{ao}(0,\theta_0) + \frac{1}{ik} [D_{\theta_0} v(0)] D_{\theta_0} f_o^{ao}(0,\theta_0) + v(0) f_1^{ao}(0,\theta_0)}{d^{3/2}} + O(d^{-5/2}) \right]$$

$$(20) \quad U_b^o = e^{ikd} \left[ \frac{v(\pi)f_o^{bo}(\pi,\theta_0)}{d^{1/2}} + \frac{\frac{1}{2ik} [D_{\theta_0}^2 v(\pi)] f_o^{bo}(\pi,\theta_0) + \frac{1}{ik} [D_{\theta_0} v(\pi)] D_{\theta_0} f_o^{bo}(\pi,\theta_0) + v(\pi) f_1^{bo}(\pi,\theta_0)}{d^{3/2}} + O(d^{-5/2}) \right]$$

### D. Elimination of $f_1$

We note that the numerators of (19) and (20) are sums of terms, consisting of plane waves and their derivatives, namely the  $v$ 's, and coefficients which are independent of  $\theta$ , namely the  $f$ 's. We see that these formulas are expressed in terms of both  $f_0$  and  $f_1$ . (For the meaning of  $f_0$  and  $f_1$  see (7) above). An advantage would result from the elimination of  $f_1$ , since we could then express the result in terms of the scattering amplitude of the far field without having to know the scattering amplitudes of further asymptotic terms.

We eliminate  $f_1$  by expressing it in terms of  $f_0$ . This can be done by means of a recursion formula. The recursion is obtained by substitution into (3) of the assumed asymptotic\* representation (7), of any radiating solution of the reduced wave equation. When we equate the corresponding inverse powers of  $r$ , we find that

$$(21) \quad f_n = \frac{1}{2ikn} \left[ \left(n - \frac{1}{2}\right)^2 f_{n-1} + D_{\theta}^2 f_{n-1} \right] .$$

This recursion is useful, also, for calculations of higher degree than we are considering here. Since we want to express  $f_1$  in terms of  $f_0$ , we need use it only for the value  $n = 1$ .

$$(22) \quad f_1 = \frac{1}{2ik} \left[ \frac{1}{4} f_0 + D_{\theta}^2 f_0 \right]$$

This is a different type of recursion from that obtained for large  $k$  by Keller, Lewis, and Seckler<sup>[8]</sup> although it is similar in form.

---

\*The representation is asymptotic for large  $r$ ,  $\theta$  and  $k$  being held fixed.

If we now substitute (22) into (19) and (20), we obtain:

$$\begin{aligned}
 (23) \quad U_a^o &= e^{ikd} \left[ \frac{v(0)f_o^{ao}(0, \theta_o)}{d^{1/2}} \right. \\
 &+ \frac{\frac{1}{2ik} \left[ D_{\theta_o}^2 v(0) \right] f_o^{ao}(0, \theta_o) + \frac{1}{ik} \left[ D_{\theta_o} v(0) \right] D_{\theta} f_o^{ao}(0, \theta_o) + \frac{1}{2ik} v(0) \left[ \frac{1}{4} f_o^{ao}(0, \theta_o) + D_{\theta}^2 f_o^{ao}(0, \theta_o) \right]}{d^{3/2}} \\
 &\left. + \mathcal{O}(d^{-5/2}) \right] \\
 (24) \quad U_b^o &= e^{ikd} \left[ \frac{v(0)f_o^{bo}(\pi, \theta_o)}{d^{1/2}} \right. \\
 &+ \frac{\frac{1}{2ik} \left[ D_{\theta_o}^2 v(\pi) \right] f_o^{bo}(\pi, \theta_o) + \frac{1}{ik} \left[ D_{\theta_o} v(\pi) \right] D_{\theta} f_o^{bo}(\pi, \theta_o) + \frac{1}{2ik} v(\pi) \left[ \frac{1}{4} f_o^{bo}(\pi, \theta_o) + D_{\theta}^2 f_o^{bo}(\pi, \theta_o) \right]}{d^{3/2}} \\
 &\left. + \mathcal{O}(d^{-5/2}) \right].
 \end{aligned}$$

The above expressions (23) and (24) represent the responses of the cylinders to the original incident plane wave and these responses are given near the other cylinder in terms of plane waves. (23) and (24) are also excitations for the second scattering. Successive application of these formulas will yield the desired degree of interaction.

#### 4. Calculation of the Interaction.

We have expressed in (23) and (24) the fields singly scattered by A and by B, as they appear in a neighborhood of the second scatterer and have moreover expressed them in terms of plane waves and derivatives of

plane waves. We may now imagine this combination of plane waves and their derivatives to be incident upon the second scatterer. The linearity of these expressions enables us to say that the responses of A and B to incident derivatives of plane waves are equal to the derivatives of the responses of A and B to the incident plane waves. Since we already know, by assumption, the unperturbed responses of A and B to an incident plane wave, we have reduced the second scattering to the previous case, namely the first scattering.

If we carry out this process to the extent of three successive scatterings, we can obtain interaction terms of degrees  $d^{-1/2}$ ,  $d^{-1}$  and  $d^{-3/2}$ . The terms of degree  $d^{-1/2}$  result from double scattering, those of degree  $d^{-1}$  result from triple scattering, and those of degree  $d^{-3/2}$  result partly from double and partly from quadruple scattering.

For the sake of simplicity, the following results will be expressed in a normalized coordinate system (Figure 5) with a common origin midway between the origins of the coordinate systems located in the scatterers. As a matter of convenience, we shall omit the subscript zero from the f's.

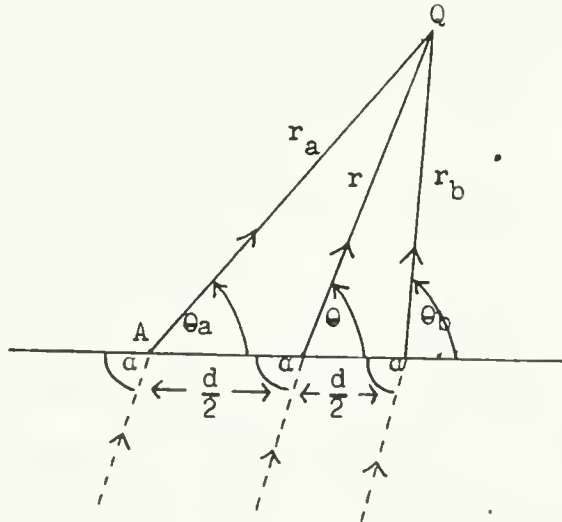


FIGURE 5

Let  $\alpha$  be the angle of incidence of the original plane wave. The perturbed patterns will then be

$$\begin{aligned}
 (25) \quad f^a(\theta, \alpha) = & e^{-ik\frac{d}{2}\cos \alpha} f^{ao}(\theta, \alpha) \\
 & + \frac{e^{ik\frac{d}{2}\cos \alpha} e^{ikd} f^{bo}(\pi, \alpha) f^{ao}(\theta, \pi)}{d^{1/2}} \\
 & + \frac{e^{-ik\frac{d}{2}\cos \alpha} e^{ik2d} f^{ao}(0, \alpha) f^{bo}(\pi, 0) f^{ao}(\theta, \pi)}{d} \\
 & + \frac{e^{ik\frac{d}{2}\cos \alpha} e^{ik3d}}{d^{3/2}} f^{bo}(\pi, \alpha) f^{ao}(0, \pi) f^{bo}(\pi, 0) f^{ao}(\theta, \pi) \\
 & + \frac{e^{ik\frac{d}{2}\cos \alpha} e^{ikd}}{d^{3/2} 2ik} \left( f^{bo}(\pi, \alpha) D_{\theta_0}^2 f^{ao}(\theta, \pi) + 2D_{\theta} f^{bo}(\pi, \alpha) D_{\theta_0} f^{ao}(\theta, \pi) \right. \\
 & \quad \left. + \left[ \frac{1}{4} f^{bo}(\pi, \alpha) + D_{\theta}^2 f^{bo}(\pi, \alpha) \right] f^{ao}(\theta, \pi) \right) \\
 & + \mathcal{O}(d^{-5/2})
 \end{aligned}$$

and

$$\begin{aligned}
 (26) \quad f^b(\theta, \alpha) = & e^{ik\frac{d}{2}\cos \alpha} f^{bo}(\theta, \alpha) + \frac{e^{-ik\frac{d}{2}\cos \alpha} e^{ikd}}{d^{1/2}} f^{ao}(\theta, \alpha) f^{bo}(\theta, 0) \\
 & + \frac{e^{ik\frac{d}{2}\cos \alpha} e^{ik2d}}{d} f^{bo}(\pi, \alpha) f^{ao}(0, \pi) f^{bo}(\theta, 0) \\
 & + \frac{e^{-ik\frac{d}{2}\cos \alpha} e^{ik3d}}{d^{3/2}} f^{ao}(0, \alpha) f^{bo}(\pi, 0) f^{ao}(0, \pi) f^{bo}(\theta, 0) \\
 & + \frac{e^{-ik\frac{d}{2}\cos \alpha} e^{ikd}}{d^{3/2} 2ik} \left( f^{ao}(0, \alpha) D_{\theta_0}^2 f^{bo}(\theta, 0) + 2D_{\theta} f^{ao}(0, \alpha) D_{\theta_0} f^{bo}(\theta, 0) \right. \\
 & \quad \left. + \left[ \frac{1}{4} f^{ao}(0, \alpha) + D_{\theta}^2 f^{ao}(0, \alpha) \right] f^{bo}(\theta, 0) \right) \\
 & + \mathcal{O}(d^{-5/2})
 \end{aligned}$$

We note that the successive powers of  $d^{-1/2}$  in (25) and (26) represent the various degrees of interaction. The scattered far fields resulting from the interaction will have the form

$$(27) \quad U_a = \frac{e^{ik(r + \frac{d}{2} \cos \theta)}}{\sqrt{r}} f^a(\theta, \alpha)$$

and

$$(28) \quad U_b = \frac{e^{ik(r - \frac{d}{2} \cos \theta)}}{\sqrt{r}} f^b(\theta, \alpha)$$

where  $f^a(\theta, \alpha)$  and  $f^b(\theta, \alpha)$  are the perturbed scattering amplitudes given by (25) and (26). The sum of the scattered fields has the following far field representation which is the sum of (27) and (28).

$$(29) \quad U_s = U_a + U_b = \frac{e^{ikr}}{\sqrt{r}} \sqrt{\frac{2}{\pi k}} e^{-i\frac{\pi}{4}} F(\theta, \alpha)$$

where  $F(\theta, \alpha)$  is the scattering amplitude of the combination of cylinders. We see by comparison with (27) and (28) that

$$(30) \quad F(\theta, \alpha) = \sqrt{\frac{\pi k}{2}} e^{i\frac{\pi}{4}} \left( e^{ik\frac{d}{2} \cos \theta} f^a(\theta, \alpha) + e^{-ik\frac{d}{2} \cos \theta} f^b(\theta, \alpha) \right)$$

A more explicit formula for the far field is obtained by combining (25), (26), (29) and (30). The far field can then be written as follows:

$$\begin{aligned}
 (31) \quad u \cong & \frac{e^{ikr}}{\sqrt{r}} \left\{ e^{ik\frac{d}{2}(\cos \theta - \cos \alpha)} f_{ao}^{ao}(\theta, \alpha) + e^{-ik\frac{d}{2}(\cos \theta - \cos \alpha)} f_{bo}^{bo}(\theta, \alpha) \right. \\
 & + \frac{e^{ikd}}{d^{1/2}} \left[ e^{ik\frac{d}{2}(\cos \theta + \cos \alpha)} f_{bo}^{bo}(\pi, \alpha) f_{ao}^{ao}(\theta, \pi) + e^{-ik\frac{d}{2}(\cos \theta + \cos \alpha)} f_{ao}^{ao}(0, \alpha) f_{bo}^{bo}(\theta, 0) \right] \\
 & + \frac{e^{ik2d}}{d} \left[ e^{ik\frac{d}{2}(\cos \theta - \cos \alpha)} f_{ao}^{ao}(0, \alpha) f_{bo}^{bo}(\pi, 0) f_{ao}^{ao}(\theta, \pi) \right. \\
 & \quad \left. + e^{-ik\frac{d}{2}(\cos \theta - \cos \alpha)} f_{bo}^{bo}(\pi, \alpha) f_{ao}^{ao}(0, \pi) f_{bo}^{bo}(\theta, 0) \right] \\
 & + \frac{e^{ik3d}}{d^{3/2}} \left[ e^{ik\frac{d}{2}(\cos \theta + \cos \alpha)} f_{bo}^{bo}(\pi, \alpha) f_{ao}^{ao}(0, \pi) f_{bo}^{bo}(\pi, 0) f_{ao}^{ao}(\theta, \pi) \right. \\
 & \quad \left. + e^{-ik\frac{d}{2}(\cos \theta + \cos \alpha)} f_{ao}^{ao}(0, \alpha) f_{bo}^{bo}(\pi, 0) f_{ao}^{ao}(0, \pi) f_{bo}^{bo}(\theta, 0) \right] \\
 & + \frac{e^{ikd}}{2ikd^{3/2}} \left[ e^{ik\frac{d}{2}(\cos \theta + \cos \alpha)} \left( f_{bo}^{bo}(\pi, \alpha) D_{\theta_0}^2 f_{ao}^{ao}(\theta, \pi) + 2D_{\theta} f_{bo}^{bo}(\pi, \alpha) D_{\theta_0} f_{ao}^{ao}(\theta, \pi) \right. \right. \\
 & \quad \left. \left. + \left\{ \frac{1}{4} f_{bo}^{bo}(\pi, \alpha) + D_{\theta}^2 f_{bo}^{bo}(\pi, \alpha) \right\} f_{ao}^{ao}(\theta, \pi) \right) \right. \\
 & \quad \left. + e^{-ik\frac{d}{2}(\cos \theta + \cos \alpha)} \left( f_{ao}^{ao}(0, \alpha) D_{\theta_0}^2 f_{bo}^{bo}(\theta, 0) + 2D_{\theta} f_{ao}^{ao}(0, \alpha) D_{\theta_0} f_{bo}^{bo}(\theta, 0) \right. \right. \\
 & \quad \left. \left. + \left\{ \frac{1}{4} f_{ao}^{ao}(0, \alpha) + D_{\theta}^2 f_{ao}^{ao}(0, \alpha) \right\} f_{bo}^{bo}(\theta, 0) \right) \right] \\
 & \left. + \mathcal{O}(d^{-5/2}) \right\}
 \end{aligned}$$

We have presented in (31) a relation between the scattered far field of the combination and those of the component cylinders. We wish to point out that a similar relation holds between the corresponding fields at all points of space. But this relation will not be detailed here.

5. A special case. Scattering by two conducting circular cylinders.

The abstract relations obtained above can be verified in the special case of scattering by two parallel conducting circular cylinders A and B with radii a and b respectively. If the electric field vector is parallel to the axis of the cylinders, we are confronted with the familiar boundary value problem

$$\text{D.E. } (\Delta + k^2)u = 0$$

$$(32) \text{ B.C. } u = 0 \text{ on the boundaries of the cylinders.}$$

$$(33) \text{ R.C. } \lim_{r \rightarrow \infty} \sqrt{r} \left( \frac{\partial u}{\partial r} - ikU \right) = 0$$

Solution of this problem for each cylinder in isolation requires the determination of coefficients  $a_n^0$  and  $b_n^0$  in (34) and (35), below

$$(34) \quad u_a^0 = \sum_{n=-\infty}^{\infty} a_n^0 H_n^{(1)}(kr_a) e^{in(\theta_a - \alpha)}$$

and

$$(35) \quad u_b^0 = \sum_{n=-\infty}^{\infty} b_n^0 H_n^{(1)}(kr_b) e^{in(\theta_b - \alpha)}$$

Expansion of the incident plane wave in terms of cylindrical waves by means of the Fourier-Bessel expansion [9] and application of the boundary conditions (32) yields



$$(36) \quad U_a^o = \sum_{n=-\infty}^{\infty} -i^n \frac{J_n(ka)}{H_n^{(1)}(ka)} H_n^{(1)}(kr_a) e^{in(\theta_a - \alpha)}$$

$$(37) \quad U_b^o = \sum_{n=-\infty}^{\infty} -i^n \frac{J_n(kb)}{H_n^{(1)}(kb)} H_n^{(1)}(kr_b) e^{in(\theta_b - \alpha)}$$

for the unperturbed scattered fields, as is well known. Using the asymptotic form of  $H_n^{(1)}$  for large argument

$$H_n^{(1)}(kr) \sim \frac{e^{ikr}}{\sqrt{r}} e^{-i\frac{\pi}{4}} \sqrt{\frac{2}{\pi k}} i^{-n}$$

we see that the far fields are

$$(38) \quad U_a^o = \frac{e^{ikr_a}}{\sqrt{r_a}} e^{-i\frac{\pi}{4}} \sqrt{\frac{2}{\pi k}} (-1) \sum_{n=-\infty}^{\infty} \frac{J_n(ka)}{H_n^{(1)}(ka)} e^{in(\theta_a - \alpha)}$$

$$(39) \quad U_b^o = \frac{e^{ikr_b}}{\sqrt{r_b}} e^{-i\frac{\pi}{4}} \sqrt{\frac{2}{\pi k}} (-1) \sum_{n=-\infty}^{\infty} \frac{J_n(kb)}{H_n^{(1)}(kb)} e^{in(\theta_b - \alpha)}$$

Normalizing our coordinate system to a new origin midway between the origins in the scatterers as we did above in the abstract treatment, we obtain

$$(40) \quad U_a^o = \frac{e^{ik(r - \frac{d}{2} \cos \theta)}}{\sqrt{r}} e^{-ik\frac{d}{2} \cos \alpha} e^{-i\frac{\pi}{4}} \sqrt{\frac{2}{\pi k}} (-1) \sum_{n=-\infty}^{\infty} \frac{J_n(ka)}{H_n^{(1)}(ka)} e^{in(\theta - \alpha)},$$

and

$$(41) \quad U_b^o = \frac{e^{ik(r - \frac{d}{2} \cos \theta)}}{\sqrt{r}} e^{+ik\frac{d}{2} \cos \alpha} e^{-i\frac{\pi}{4}} \sqrt{\frac{2}{\pi k}} (-1) \sum_{n=-\infty}^{\infty} \frac{J_n(kb)}{H_n^{(1)}(kb)} e^{in(\theta - \alpha)},$$

from which we observe that the unperturbed patterns are respectively

$$(42) \quad f_o^{ao}(\theta, \alpha) = e^{-i\frac{\pi}{4}} \sqrt{\frac{2}{\pi k}} \sum_{n=-\infty}^{\infty} (-1)^n \frac{J_n(ka)}{H_n^{(1)}(ka)} e^{in(\theta-\alpha)}$$

$$(43) \quad f_o^{bo}(\theta, \alpha) = e^{-i\frac{\pi}{4}} \sqrt{\frac{2}{\pi k}} \sum_{n=-\infty}^{\infty} (-1)^n \frac{J_n(kb)}{H_n^{(1)}(kb)} e^{in(\theta-\alpha)}$$

The perturbed patterns can be obtained by the following procedure:

We take the multiple scattering viewpoint, as we did in the abstract case. Each excitation elicits a response. The responses to the initial plane wave have the form (34) and (35). These responses, in turn, excite the second cylinder, eliciting new responses. Unlike the procedure of the abstract treatment, however, these excitations are not expressed in terms of plane waves, nor are the responses expressed in an asymptotic form.

At all stages intermediate between the initial plane wave excitation and the evaluation of the far field response of the combination, the excitations will have the general form

$$(44) \quad \sum_{p=-\infty}^{\infty} c_p H_p^{(1)}(kr) e^{ip\theta}$$

and the responses will have the general form

$$(45) \quad \sum_{q=-\infty}^{\infty} d_q H_q^{(1)}(kr) e^{iq\theta}$$

The proper adjustments must be made in (44) and (45) for angles of incidence and the fields must be expressed in their proper coordinate

systems. The coefficients  $C_p$  and  $d_q$  are determined successively for each scattering by the boundary conditions on the cylinders which are, in this case, that the sum of the excitation and its response is, for each cylinder, zero on the boundary of that cylinder. The application of the boundary conditions requires that each excitation be represented in the same coordinate system as its response. This is accomplished by the application of addition theorems for cylindrical waves<sup>[9]</sup>. The process\* is continued until the desired degree of scattering is obtained. Application of this method yields, up to terms of degree  $d^{-3/2}$ , the following perturbed patterns:

(Equations on pages 22 and 23)

---

\*Throughout this calculation we follow the procedure of Twersky<sup>[2]</sup>; but, unlike that author, we do not neglect any terms of order  $d^{-3/2}$ , in computing the final form of the result for large  $d$ .

$$(16) \quad r_0^2(\theta, \alpha) = e^{-ik_2^d \cos \alpha} e^{-i\frac{\pi}{L}} \sqrt{\frac{2}{\pi k}} \sum_n (-1)^n \frac{J_n(ka)}{H_n^{(1)}(ka)} e^{in(\theta - \alpha)}$$

$$+ \frac{e^{-ik_2^d \cos \alpha}}{d^{1/2}} \frac{e^{ikd}}{e^{-i\frac{\pi}{2}}} \left(\frac{2}{\pi k}\right) \sum_n (-1)^n e^{-in\alpha} \frac{J_n(kb)}{H_n^{(1)}(kb)} \sum_{n'} \frac{J_{n'}(ka)}{H_{n'}^{(1)}(ka)} e^{in'(\theta - \pi)}$$

$$+ \frac{e^{-ik_2^d \cos \alpha}}{d} \frac{e^{ik2d}}{e^{-i\frac{3\pi}{4}}} \left(\frac{2}{\pi k}\right)^{3/2} \sum_n (-1)^n e^{-in\alpha} \frac{J_n(ka)}{H_n^{(1)}(ka)} \sum_{n'} (-1)^{n'} \frac{J_{n'}(kb)}{H_{n'}^{(1)}(kb)} \sum_{n''} \frac{J_{n''}(ka)}{H_{n''}^{(1)}(ka)} e^{in''(\theta - \pi)}$$

$$+ \frac{e^{-ik_2^d \cos \alpha}}{d^{3/2}} \frac{e^{ik3d}}{e^{-i\pi}} \left(\frac{2}{\pi k}\right)^2 \sum_n (-1)^n e^{-in\alpha} \frac{J_n(kb)}{H_n^{(1)}(kb)} \sum_{n'} (-1)^{n'} \frac{J_{n'}(ka)}{H_{n'}^{(1)}(ka)}$$

$$\sum_{n''} (-1)^{n''} \frac{J_{n''}(kb)}{H_{n''}^{(1)}(kb)} \sum_{n'''} \frac{J_{n'''}(ka)}{H_{n'''}^{(1)}(ka)} e^{in'''(\theta - \pi)}$$

$$+ \frac{e^{-ik_2^d \cos \alpha}}{d^{3/2}} \frac{e^{ikd}}{e^{-i\frac{\pi}{2}}} \left(\frac{2}{\pi k}\right) \sum_n (-1)^n e^{-in\alpha} \frac{J_n(kb)}{H_n^{(1)}(kb)} \sum_{n'} \left[ \frac{(n - n')^2 - \frac{1}{L}}{H_{n'}^{(1)}(ka)} \right] \frac{J_{n'}(ka)}{H_{n'}^{(1)}(ka)} e^{in'(\theta - \pi)}$$

$$+ \mathcal{O}(d^{-5/2})$$

$$(47) \quad f_0^b(\theta, \alpha) = e^{ik_2^d \cos \alpha} e^{-i\frac{\pi}{4}} \sqrt{\frac{2}{\pi k}} \sum_n (-1)^n \frac{J_n(kb)}{H_n^{(1)}(kb)} e^{in(\theta - \alpha)}$$

$$+ \frac{e^{-ik_2^d \cos \alpha}}{d^{1/2}} e^{ikd} e^{-i\frac{\pi}{2}} \left(\frac{2}{\pi k}\right) \sum_n e^{-in\alpha} \frac{J_n(ka)}{H_n^{(1)}(ka)} \sum_{n'} \frac{J_{n'}(kb)}{H_{n'}^{(1)}(kb)} e^{in'\theta}$$

$$+ \frac{e^{ik_2^d \cos \alpha}}{d} e^{ik2d} e^{-i\frac{3\pi}{4}} \left(\frac{2}{\pi k}\right)^{3/2} \sum_n (-1)^n e^{-in\alpha} \frac{J_n(kb)}{H_n^{(1)}(kb)} \sum_{n'} (-1)^{n'} \frac{J_{n'}(ka)}{H_{n'}^{(1)}(ka)} \sum_{n''} \frac{J_{n''}(kb)}{H_{n''}^{(1)}(kb)} e^{in''\theta}$$

$$+ \frac{e^{-ik_2^d \cos \alpha}}{d^{3/2}} e^{ik3d} e^{-in} \left(\frac{2}{\pi k}\right)^2 \sum_n e^{-in\alpha} \frac{J_n(ka)}{H_n^{(1)}(ka)} \sum_{n'} (-1)^{n'} \frac{J_{n'}(kb)}{H_{n'}^{(1)}(kb)}$$

$$\sum_{n''} (-1)^{n''} \frac{J_{n''}(ka)}{H_{n''}^{(1)}(ka)} \sum_{n'''} \frac{J_{n'''}(kb)}{H_{n'''}^{(1)}(kb)} e^{in'''\theta}$$

$$+ \frac{e^{-ik_2^d \cos \alpha}}{d^{3/2}} e^{ikd} e^{-i\frac{\pi}{2}} \left(\frac{2}{\pi k}\right) \sum_n (-1)^n e^{-in\alpha} \frac{J_n(ka)}{H_n^{(1)}(ka)} \sum_{n'} \left[ (n' - n)^2 - \frac{1}{4} \right] \frac{J_{n'}(kb)}{H_{n'}^{(1)}(kb)} e^{in'\theta}$$

$$+ \mathcal{O}(d^{-5/2})$$

Calculations of a similar nature have been carried out by Twersky<sup>[2]</sup> for two identical cylinders with more general boundary conditions. Comparison of (46) and (47) with formula (6) of Twersky's paper show that the non-interaction terms in our result agree with Twersky's first term and our terms of degree  $d^{-1/2}$  agree with Twersky's second term. Our term of degree  $d^{-1}$  agrees with the third term in Twersky's paper and also with an equivalent corresponding term in a report<sup>[1]</sup> by Twersky on which his paper was based. Our terms of degree  $d^{-3/2}$  do not agree with Twersky's fourth term, but we should not expect such agreement.

Twersky's terms are the asymptotic representations of successive orders of scattering, that is successive bounces. Our successive powers of  $d^{-1/2}$ , however, do not correspond to successive bounces. Our term of degree  $d^{-3/2}$ , for example, contains contributions from the second bounce as well as the fourth bounce.

The procedure used above for obtaining (46) and (47) is long and tedious. These results need not be obtained by that procedure. The use of the abstract formulas (25) and (26) simplify the calculation considerably and should do the same in any other case where the scattering problems for the component cylinders are separable. All we need do is substitute (42) and (43) into (25) and (26) respectively. The results follow immediately and agree with (46) and (47) respectively.

## 6. An Explanation of the Result

The expression (31) for the scattered far field of the combination of two cylinders appears, at first glance, to be complicated. However, it is not as abstruse as it seems. A closer examination of these expressions

reveals the significance of these various terms and factors. We note first that the terms are grouped in increasing orders of accuracy. We note also that they are grouped in pairs. The first members of each pair represent fields ultimately scattered by cylinder A while the second members of the pairs represent fields ultimately scattered by cylinder B. The first pair corresponds to single scattering while the other pairs correspond to multiple scattering. The factors  $e^{\pm i k \frac{d}{2} \cos \theta}$  represent the phase differences for the scatterers relative to the point of observation while the factors  $e^{\pm i k \frac{d}{2} \cos \alpha}$  take into account the phase of the incident wave at the center of a scatterers when the incident wave has zero phase at the origin. The f's containing a  $\theta$  dependence are scattering patterns whereas the f's containing specific values for  $\theta$  are excitation factors accumulated in the multiple scattering. We note also that the factors of the form  $e^{i k n d}$  where  $n = 0, 1, 2, 3$  refer to the increase  $i k d$  in the phase of a wave in going from one scatterer to another and that  $n$  signifies the number of bounces.

As an illustration of the above remarks, let us consider some of the terms in more detail. The term  $\frac{e^{i k r}}{\sqrt{r}} e^{i k \frac{d}{2} (\cos \theta - \cos \alpha)} f^{ao}(\theta, \alpha)$  would occur in the case of no interaction, i.e. in the limit of infinite spacing. The factor  $\exp \frac{i k d}{2} (\cos \theta)$  takes account of the fact that the origin is not at the center of A. The positive sign preceding  $\cos \theta$  shows that the scattered wave came from cylinder A. The negative sign in the exponent of the factor  $e^{-i k \frac{d}{2} \cos \alpha}$  shows that cylinder A received the initial excitation. It gives the phase of the incident wave at A. The term

$$\frac{e^{i k r}}{\sqrt{r}} e^{i k \frac{d}{2} (\cos \theta + \cos \alpha)} f_{(\pi, \alpha)}^{bo} f_{(\theta, \pi)}^{ao}$$



differs from the first term in the following respects. The positive sign in the factor  $\exp(+\frac{ikd}{2}\cos \alpha)$  shows that cylinder B received the original excitation as does the factor  $f_{(\pi,\alpha)}^{bo}$ . The phase factor  $e^{ikd}$  represents the increase of the phase of the wave in going from B to A.

We shall now explain a typical term of the last square bracket. The first term in the last square bracket of (31) represents the scattering by A of a term of order  $d^{-3/2}$  initially scattered by B. The phase factor  $e^{ikd}$  takes account of the travel of this wave from B to A.

The positive sign preceding  $\cos \alpha$  shows that cylinder B was excited initially. The differentiation of the scattering amplitudes shows the effect of a higher order excitation of A by the field initially scattered by B, since the higher order response of B, (which acts as an excitation for A), is representable, near A, as a derivative of a plane wave with respect to angle of incidence.

The explanation of further terms in the final result proceeds on the same lines as the explanations given above. We omit these explanations for the sake of brevity.

#### 7. The total scattering cross-section of a combination of two identical circular cylinders.

We consider a plane wave normally incident on a pair of identical circular cylinders. The circumstances are illustrated in Figure 6.



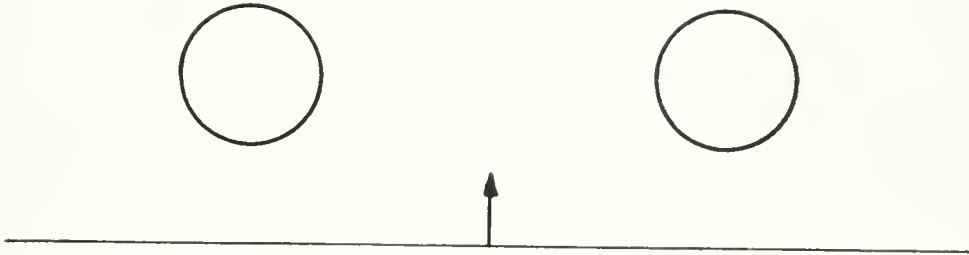


FIGURE 6

The computation of the total scattering cross section  $\sigma$  of the two identical circular cylinders is facilitated by the use of (30) in conjunction with the following well known theorem [2], [3],

$$(48) \quad \sigma = -\frac{4}{k} \operatorname{Re} F\left(\frac{\pi}{2}, \frac{\pi}{2}\right) .$$

where  $F(\theta, \alpha)$  is the scattering amplitude (30) of the combination. The phase factors are simplified for the values  $\theta = \frac{\pi}{2}$ ,  $\alpha = \frac{\pi}{2}$ . The fact that the cylinders are identical enables us to write  $f^o = f^{ao} = f^{bo}$ . Further simplifications result from the geometrical symmetry of the problem, namely

$$f^o(o, \pi) = f^o(\pi, o), \quad f^o\left(\frac{\pi}{2}, o\right) = f^o\left(o, \frac{\pi}{2}\right) = f^o\left(\pi, \frac{\pi}{2}\right) = f^o\left(\frac{\pi}{2}, \pi\right)$$

The total scattering cross section in terms of the spacing is then

$$(49) \quad \sigma = -\frac{1}{k} \operatorname{Re} \left[ \sqrt{2\pi k} e^{i\frac{\pi}{4}} \left\{ f^o\left(\frac{\pi}{2}, \frac{\pi}{2}\right) + \frac{e^{ikd}}{d^{1/2}} \left[ f^o\left(o, \frac{\pi}{2}\right) \right]^2 + \frac{e^{ik2d}}{d} \left[ f^o\left(o, \frac{\pi}{2}\right) \right]^2 f^o(\pi, o) \right. \right. \\ \left. \left. + \frac{e^{ik3d}}{d^{3/2}} \left[ f^o\left(o, \frac{\pi}{2}\right) \right]^2 \left[ f^o(\pi, o) \right]^2 \right. \right. \\ \left. \left. + \frac{e^{ikd}}{d^{3/2}} \frac{1}{2ik} \left( f^o\left(o, \frac{\pi}{2}\right) D_{\theta_o}^2 f^o\left(o, \frac{\pi}{2}\right) + 2D_{\theta} f^o\left(o, \frac{\pi}{2}\right) D_{\theta_o} f_{\phi}^o\left(o, \frac{\pi}{2}\right) \right. \right. \right. \\ \left. \left. \left. + \left[ \frac{1}{4} f^o\left(o, \frac{\pi}{2}\right) + D_{\theta}^2 f^o\left(o, \frac{\pi}{2}\right) \right] f^o\left(o, \frac{\pi}{2}\right) \right) \right. \right. \\ \left. \left. + O(d^{-5/2}) \right\} \right]$$

## 8. Additional Remarks

It is clear that interactions of degree greater than  $d^{-3/2}$  can be computed by the inclusion of more terms in the expansions used to obtain these results.

It is also clear that the method applies to cases of more than two scatterers, but the computations would be more tedious than in the case of two scatterers. The computations might be simplified by using a "consistency" method employed in [2] rather than tracing the successive scattering in detail. This method involves a steady state point of view. The response of each cylinder is expanded in a neighborhood of each of the other cylinders. Each cylinder will then be excited by the incident plane wave and by an approximately plane wave from each of the other cylinders.

These considerations introduce certain undetermined coefficients which can be determined by imposing the requirement that the field<sup>s</sup> scattered by the various cylinders be consistent with one another. Evaluation of the coefficients will provide the solution.

## II. Three Dimensional Case.

1. Statement of the Problem. The method employed previously in the case of multiple scattering of plane waves by two widely spaced cylinders of arbitrary shape can be applied, also to the corresponding three dimensional scalar problem for two bodies of arbitrary shape.

The assumptions here, as in the previous case, are that:

- 1) The spacing of the bodies is large compared to their dimensions.
- 2) The spacing is large compared to the wavelength of the incident plane wave.
- 3) The response of each scatterer to a plane wave excitation is known when the scatterer is isolated in space. In other words, the individual unperturbed complex scattering amplitudes of the far fields are known.

The situation is the following:

A plane wave of unit amplitude

$$(1) \quad u = e^{ik(x \sin \theta_0 \cos \phi_0 + y \sin \theta_0 \sin \phi_0 + z \cos \theta_0)}$$

where  $\theta_0$  and  $\phi_0$  are the angles of incidence (see Figure 1), is incident upon the combination of two bodies (Figure 2, page 32).

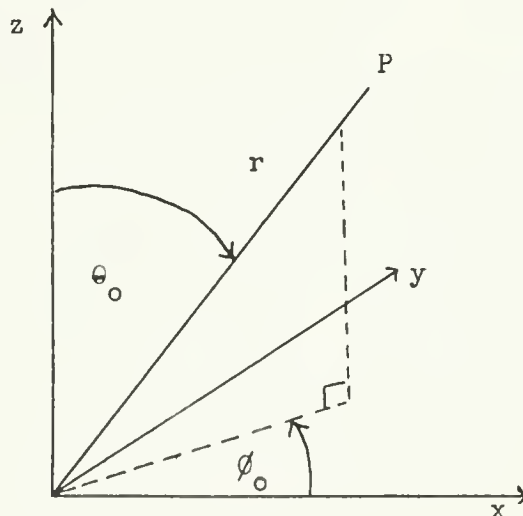


Figure 1

The response of each body in isolation to the incident plane wave is of the form

$$(2) \quad U_s = \frac{e^{ikr}}{r} \sum_{n=0}^{\infty} \frac{f_n(\theta, \theta_0, \phi, \phi_0)}{r^n}$$

Here we are referring to spherical coordinates,  $r, \theta, \phi$ , such that

$$(2a) \quad \begin{aligned} x &= r \sin \theta \cos \phi \\ y &= r \sin \theta \sin \phi \\ z &= r \cos \theta \end{aligned}$$

The letters  $x, y, z$  are cartesian coordinates of a point  $P$  with respect to a coordinate system located appropriately. The quantities  $\theta_0$  and  $\phi_0$  which specify the direction of travel of the incident wave can be thought of as the colatitude and longitude respectively of a point on the unit sphere. That point is determined as the intersection with the unit sphere of a line passing through the origin in the direction of travel of the incident wave.

The object is to obtain the perturbed complex scattering amplitude of the combination as a function of the individual unperturbed scattering amplitudes. This can be done, as in the previous case, by first expanding the field scattered by each body in a neighborhood of the other body and then expressing these scattered fields in terms of plane waves and their derivatives. The a priori assumption that the unperturbed responses to an incident plane wave are known permits the calculation of the perturbed responses.

We must establish coordinate systems for the problem. We first circumscribe spheres  $A'$  and  $B'$  about the respective bodies  $A$  and  $B$ .

This establishes the origins of the coordinate systems of A and B (Figure 2)

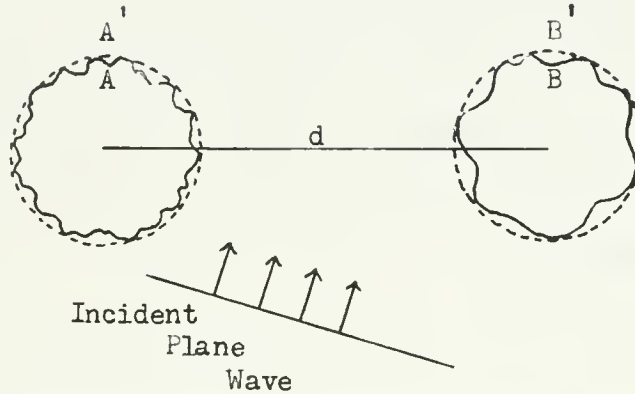


FIGURE 2

The spacing  $d$  is defined as the line joining the two centers. We then choose the  $x_a$  axis (Figure 3)...i.e. the  $x$  axis for the coordinate system of A, to be collinear with  $d$  and such that  $x_a$  increases in the direction of B.

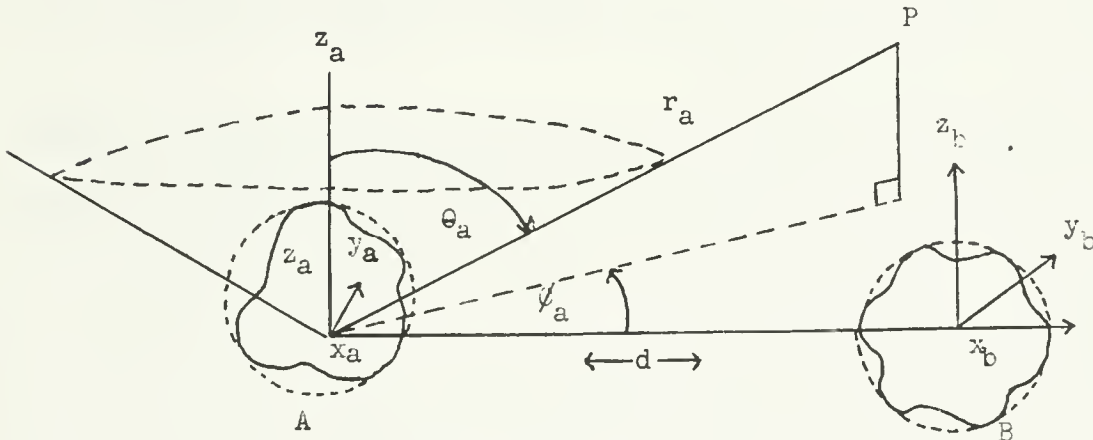


FIGURE 3

The  $y_a$  and  $z_a$  axes can then be chosen to form a right-handed system and the coordinate system of B is parallel to that of A. (Choice of the  $z$  axis along  $d$ , instead of the  $x$  axis, would be more symmetrical, but has been avoided for reasons which will be explained later.)

## 2. Expansion of the scattered waves in terms of plane waves.

We proceed to expand the response of each body in a neighborhood of the other body. This expansion yields the following field scattered by A in a neighborhood of B where the cartesian coordinates are in the B system.

$$(3) \quad U_{s_a}^o = e^{ik(d+x_b)} \left[ \frac{1}{d} f_o^{ao} \left( \frac{\pi}{2}, \theta_o, 0, \phi_o \right) + \frac{1}{d^2} \left\{ \frac{ik(y^2+z^2)}{2} f_o^{ao} \left( \frac{\pi}{2}, \theta_o, 0, \phi_o \right) - x_b f_o^{ao} \left( \frac{\pi}{2}, \theta_o, 0, \phi_o \right) \right. \right. \\ \left. \left. - z D_\theta f_o^{ao} \left( \frac{\pi}{2}, \theta_o, 0, \phi_o \right) + y D_\phi f_o^{ao} \left( \frac{\pi}{2}, \theta_o, 0, \phi_o \right) + f_1^{ao} \left( \frac{\pi}{2}, \theta_o, 0, \phi_o \right) \right\} + O(d^{-3}) \right]$$

In calculating equation (3) the phase of the incident wave at the 'center' of A has been ignored. The appropriate phase factor will be restored in the final result. A similar expansion of the field scattered by B in a neighborhood of A yields

$$(4) \quad U_{s_b}^o = e^{ik(d-x_a)} \left[ \frac{1}{d} f_o^{bo} \left( \frac{\pi}{2}, \theta_o, \pi, \phi_o \right) + \frac{1}{d^2} \left\{ \frac{ik(y^2+z^2)}{2} f_o^{bo} \left( \frac{\pi}{2}, \theta_o, \pi, \phi_o \right) + x_a f_o^{bo} \left( \frac{\pi}{2}, \theta_o, \pi, \phi_o \right) \right. \right. \\ \left. \left. - z D_\theta f_o^{bo} \left( \frac{\pi}{2}, \theta_o, \pi, \phi_o \right) - y D_\phi f_o^{bo} \left( \frac{\pi}{2}, \theta_o, \pi, \phi_o \right) + f_1^{bo} \left( \frac{\pi}{2}, \theta_o, \pi, \phi_o \right) \right\} + O(d^{-3}) \right]$$

where  $D_\theta = \frac{\partial}{\partial \theta}$  and  $D_\phi = \frac{\partial}{\partial \phi}$

We now express these scattered fields in terms of plane waves by

means of the following relations:

$$v(\theta_0, \varphi_0) = e^{ik(x \sin \theta_0 \cos \varphi_0 + y \sin \theta_0 \sin \varphi_0 + z \cos \theta_0)},$$

$$v(\frac{\pi}{2}, 0) = e^{ikx}, \quad v(\frac{\pi}{2}, \pi) = e^{-ikx},$$

$$v_{\theta_0}(\frac{\pi}{2}, 0) = -ikze^{ikx}, \quad v_{\theta_0}(\frac{\pi}{2}, \pi) = -ikze^{-ikx},$$

$$v_{\varphi_0}(\frac{\pi}{2}, 0) = ikye^{ikx}, \quad v_{\varphi_0}(\frac{\pi}{2}, \pi) = -ikye^{-ikx},$$

$$\frac{1}{2ik} \left[ v_{\theta_0 \theta_0}(\frac{\pi}{2}, 0) + v_{\varphi_0 \varphi_0}(\frac{\pi}{2}, 0) \right] = \left[ \frac{ik(y^2 + z^2)}{2} - x \right] e^{ikx},$$

$$\frac{1}{2ik} \left[ v_{\theta_0 \theta_0}(\frac{\pi}{2}, \pi) + v_{\varphi_0 \varphi_0}(\frac{\pi}{2}, \pi) \right] = \left[ \frac{ik(y^2 + z^2)}{2} + x \right] e^{-ikx},$$

Substitution of these relations into (3) and (4) yields:

$$(5) \quad U_{s_a}^0 = e^{ikd} \left[ \frac{1}{d} v(\frac{\pi}{2}, 0) f_0^{ao}(\frac{\pi}{2}, \theta_0, 0, \varphi_0) + \frac{1}{d^2} \left( \frac{1}{2ik} \left[ v_{\theta_0 \theta_0}(\frac{\pi}{2}, 0) + v_{\varphi_0 \varphi_0}(\frac{\pi}{2}, 0) \right] f_0^{ao}(\frac{\pi}{2}, \theta_0, 0, \varphi_0) \right. \right. \\ + v_{\theta_0}(\frac{\pi}{2}, 0) D_{\theta} f_0^{ao}(\frac{\pi}{2}, \theta_0, 0, \varphi_0) \\ + v_{\varphi_0}(\frac{\pi}{2}, 0) D_{\varphi} f_0^{ao}(\frac{\pi}{2}, \theta_0, 0, \varphi_0) \\ \left. \left. + v(\frac{\pi}{2}, 0) f_1^{ao}(\frac{\pi}{2}, \theta_0, 0, \varphi_0) \right) + O(d^{-3}) \right],$$

and



$$(6) \quad U_{s_b}^o = e^{ikd} \left[ \frac{1}{d} v\left(\frac{\pi}{2}, \pi\right) f_o^{bo}\left(\frac{\pi}{2}, \theta_o, \pi, \phi_o\right) + \frac{1}{d^2} \left( \frac{1}{2ik} \left[ v_{\theta_o \theta_o}\left(\frac{\pi}{2}, \pi\right) + v_{\phi_o \phi_o}\left(\frac{\pi}{2}, \pi\right) \right] f_o^{bo}\left(\frac{\pi}{2}, \theta_o, \pi, \phi_o\right) \right. \right. \\ \left. \left. + v_{\theta_o}\left(\frac{\pi}{2}, \pi\right) D_{\theta} f_o^{bo}\left(\frac{\pi}{2}, \theta_o, \pi, \phi_o\right) \right. \right. \\ \left. \left. + v_{\phi_o}\left(\frac{\pi}{2}, \pi\right) D_{\phi} f_o^{bo}\left(\frac{\pi}{2}, \theta_o, \pi, \phi_o\right) \right. \right. \\ \left. \left. + v\left(\frac{\pi}{2}, \pi\right) f_1^{bo}\left(\frac{\pi}{2}, \theta_o, \pi, \phi_o\right) \right) + O(d^{-3}) \right].$$

These fields can then be expressed in terms of  $f_o$  alone by means of a recursion formula (7) obtained by Sommerfeld [14].

$$(7) \quad 2ik(n+1)f_{n+1} = \left\{ n(n+1) + \frac{1}{\sin \theta} \frac{\partial}{\partial \theta} \left( \sin \theta \frac{\partial}{\partial \theta} \right) + \frac{1}{\sin^2 \theta} \frac{\partial^2}{\partial \phi^2} \right\} f_n.$$

In our case  $n = 0$ , and the recursion reduces to

$$(8) \quad 2ikf_1 = \left\{ \cot \theta D_{\theta} + D_{\theta}^2 + \csc^2 \theta D_{\phi}^2 \right\} f_o.$$

It is here that the proper choice of a coordinate system is seen to be convenient. We note that the recursion involves the Beltrami Operator which is singular at  $\theta = 0$ . This singularity occurs in the direction joining A to B, if the  $z$  axis is chosen collinear with  $d$ . Another difficulty in using such a coordinate system is the occurrence of terms in the expansions (3) and (4) which are not easily replaceable by derivatives of plane waves. The coordinate system we have selected overcomes these difficulties.

For  $\theta = \frac{\pi}{2}$  and  $\phi = 0$ , (8) becomes

$$(9) \quad f_1\left(\frac{\pi}{2}, \theta_o, 0, \phi_o\right) = \frac{1}{2ik} \left\{ D_\theta^2 + D_\phi^2 \right\} f_o\left(\frac{\pi}{2}, \theta_o, 0, \phi_o\right)$$

For  $\theta = \frac{\pi}{2}$  and  $\phi = \pi$ , (8) becomes

$$(10) \quad f_1\left(\frac{\pi}{2}, \theta_o, \pi, \phi_o\right) = \frac{1}{2ik} \left\{ D_\theta^2 + D_\phi^2 \right\} f_o\left(\frac{\pi}{2}, \theta_o, \pi, \phi_o\right)$$

Substitution of (9) and (10) into (5) and (6) results in expressions (11) and (12) for  $U_{s_a}^o$  and  $U_{s_b}^o$ , which do not contain  $f_1^{ao}$  and  $f_1^{bo}$ .

$$(11) \quad U_{s_a}^o = e^{ikd} \left[ \frac{1}{d} v\left(\frac{\pi}{2}, 0\right) f_o^{ao}\left(\frac{\pi}{2}, \theta_o, 0, \phi_o\right) + \frac{1}{d^2} \left\{ \frac{1}{2ik} \left[ \left\{ D_\theta^2 + D_\phi^2 \right\} v\left(\frac{\pi}{2}, 0\right) \right] f_o^{ao}\left(\frac{\pi}{2}, \theta_o, 0, \phi_o\right) \right. \right. \\ + D_{\theta_o} v\left(\frac{\pi}{2}, 0\right) D_{\theta_o} f_o^{ao}\left(\frac{\pi}{2}, \theta_o, 0, \phi_o\right) \\ + D_{\phi_o} v\left(\frac{\pi}{2}, 0\right) D_{\phi_o} f_o^{ao}\left(\frac{\pi}{2}, \theta_o, 0, \phi_o\right) \\ \left. \left. + \frac{1}{2ik} v\left(\frac{\pi}{2}, 0\right) \left\{ D_\theta^2 + D_\phi^2 \right\} f_o^{ao}\left(\frac{\pi}{2}, \theta_o, 0, \phi_o\right) \right\} \right. \\ \left. + \mathcal{O}(d^{-3}) \right] \\ (12) \quad U_{s_b}^o = e^{ikd} \left[ \frac{1}{d} v\left(\frac{\pi}{2}, \pi\right) f_o^{bo}\left(\frac{\pi}{2}, \theta_o, \pi, \phi_o\right) + \frac{1}{d^2} \left\{ \frac{1}{2ik} \left[ \left\{ D_\theta^2 + D_\phi^2 \right\} v\left(\frac{\pi}{2}, \pi\right) \right] f_o^{bo}\left(\frac{\pi}{2}, \theta_o, \pi, \phi_o\right) \right. \right. \\ + D_{\theta_o} v\left(\frac{\pi}{2}, \pi\right) D_{\theta_o} f_o^{bo}\left(\frac{\pi}{2}, \theta_o, \pi, \phi_o\right) \\ + D_{\phi_o} v\left(\frac{\pi}{2}, \pi\right) D_{\phi_o} f_o^{bo}\left(\frac{\pi}{2}, \theta_o, \pi, \phi_o\right) \\ \left. \left. + \frac{1}{2ik} v\left(\frac{\pi}{2}, \pi\right) \left\{ D_\theta^2 + D_\phi^2 \right\} f_o^{bo}\left(\frac{\pi}{2}, \theta_o, \pi, \phi_o\right) \right\} \right. \\ \left. + \mathcal{O}(d^{-3}) \right]$$

### 3. Calculation of the perturbed far field amplitude.

The method employed previously in the two dimensional case will now yield, up to interaction terms of degree  $d^{-2}$ , the field scattered by the two bodies.

The final result must take into account the difference in phase of the original plane wave with respect to the two scatterers and also the difference in phase of the scattered fields of the two bodies at the point of observation. This can be done by a normalization of the coordinate systems and subsequent consideration of the phases in the normalized coordinate system. By a normalized coordinate system we mean a central coordinate system whose origin lies midway between the origins for A and B and whose x, y and z axes are parallel to those emanating from the origins of A and B. If we let  $\alpha$  and  $\beta$  denote the angles of incidence corresponding to colatitude and longitude respectively (Figure 4), we obtain the following expression for the field scattered by the two bodies: (The subscript "o" is omitted from the f's for convenience.)  
(Here the incident wave is taken to have zero phase at the origin of the normalized system of coordinates.)

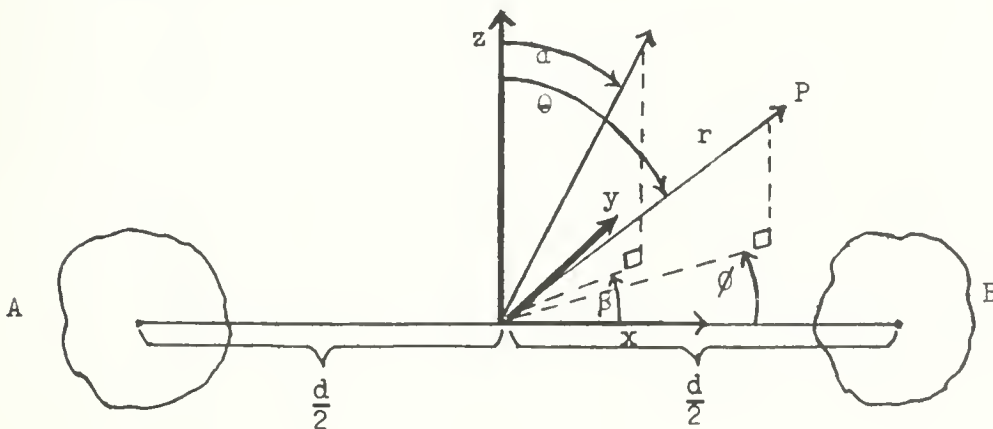


FIGURE 4

(13)

$$u_s \approx \frac{e}{r} \frac{ikr}{e}$$

$$e^{ik\frac{d}{2}(\sin\theta \cos\theta - \sin\alpha \cos\beta)} f^{ao}(\theta, \alpha, \theta, \beta) + e^{-ik\frac{d}{2}(\sin\theta \cos\theta - \sin\alpha \cos\beta)} f^{bo}(\theta, \alpha, \theta, \beta)$$

$$e^{ik\frac{d}{2}(\sin\theta \cos\theta - \sin\alpha \cos\beta)} \frac{e}{d} f^{ao}(\theta, \frac{\pi}{2}, \theta, \pi) f^{bo}(\frac{\pi}{2}, \alpha, \pi, \beta) + e^{-ik\frac{d}{2}(\sin\theta \cos\theta - \sin\alpha \cos\beta)} \frac{e}{d} f^{bo}(\theta, \frac{\pi}{2}, \theta, 0) f^{ao}(\frac{\pi}{2}, \alpha, 0, \beta)$$

$$+ e^{ik\frac{d}{2}(\sin\theta \cos\theta - \sin\alpha \cos\beta)} \frac{e}{d^2} f^{ao}(\theta, \frac{\pi}{2}, \theta, \pi) f^{bo}(\frac{\pi}{2}, \pi, 0) f^{ao}(\frac{\pi}{2}, \alpha, 0, \beta)$$

$$+ e^{-ik\frac{d}{2}(\sin\theta \cos\theta - \sin\alpha \cos\beta)} \frac{e}{d^2} f^{bo}(\theta, \frac{\pi}{2}, \theta, 0) f^{ao}(\frac{\pi}{2}, \pi, 0, \pi) f^{bo}(\frac{\pi}{2}, \alpha, \pi, \beta)$$

$$+ e^{ik\frac{d}{2}(\sin\theta \cos\theta + \sin\alpha \cos\beta)} \frac{e}{d^2} \left\{ \frac{1}{2ik} \left[ D_{\theta_o}^2 + D_{\theta_o}^2 \right] f^{ao}(\theta, \frac{\pi}{2}, \theta, \pi) f^{bo}(\frac{\pi}{2}, \alpha, \pi, \beta) + D_{\theta_o} f^{ao}(\theta, \frac{\pi}{2}, \theta, \pi) D_{\theta_o} f^{bo}(\frac{\pi}{2}, \alpha, \pi, \beta) \right\}$$

$$+ D_{\theta_o} f^{ao}(\theta, \frac{\pi}{2}, \theta, \pi) D_{\theta_o} f^{bo}(\frac{\pi}{2}, \alpha, \pi, \beta) + \frac{1}{2ik} f^{ao}(\theta, \frac{\pi}{2}, \theta, \pi) \left[ D_{\theta_o}^2 + D_{\theta_o}^2 \right] f^{bo}(\frac{\pi}{2}, \alpha, \pi, \beta) \right\}$$

$$+ e^{-ik\frac{d}{2}(\sin\theta \cos\theta + \sin\alpha \cos\beta)} \frac{e}{d^2} \left\{ \frac{1}{2ik} \left[ D_{\theta_o}^2 + D_{\theta_o}^2 \right] f^{bo}(\theta, \frac{\pi}{2}, \theta, 0) f^{ao}(\frac{\pi}{2}, \alpha, 0, \beta) + D_{\theta_o} f^{bo}(\theta, \frac{\pi}{2}, \theta, 0) D_{\theta_o} f^{ao}(\frac{\pi}{2}, \alpha, 0, \beta) \right\}$$

$$+ D_{\theta_o} f^{bo}(\theta, \frac{\pi}{2}, \theta, 0) D_{\theta_o} f^{ao}(\frac{\pi}{2}, \alpha, 0, \beta) + \frac{1}{2ik} f^{bo}(\theta, \frac{\pi}{2}, \theta, 0) \left[ D_{\theta_o}^2 + D_{\theta_o}^2 \right] f^{ao}(\frac{\pi}{2}, \alpha, 0, \beta) \right\}$$

$$+ \mathcal{O}(d^{-3})$$

4. An Explanation of the Result. The expression (13) for the scattered field of the combination of two bodies appears, at first glance, to be complicated. However, it is not as abstruse as it seems. A closer examination of this expression along the lines followed in the two dimensional case reveals the significance of the various terms and factors. We observe first that there are eight terms up to the order of accuracy  $d^{-2}$  calculated here, and we shall refer to them by number in the order of their appearance above. The first two terms represent single scattering while the others represent multiple scattering.

The functions  $f$  represent the complex scattering amplitude of the respective bodies with respect to an origin in the center of the relevant body, when the incident wave has zero phase at that center. The odd numbered terms represent the fields ultimately scattered by body A whereas the even numbered terms represent fields ultimately scattered by B.

The factors  $e^{\pm i k \frac{d}{2} \sin \theta \cos \phi}$  represent the phase differences for the scatterers due to the use of the normalized coordinate system, while the factors  $e^{\pm i k \frac{d}{2} \sin \alpha \cos \beta}$  take into account the phase of the incident wave at the center of the respective scatterers. The  $f$ 's containing a  $\theta$  and  $\phi$  dependence are scattering patterns while the  $f$ 's with specific values for  $\theta$  and  $\phi$  are excitation factors accumulated in the multiple scattering. We note, finally, that the factors of the form  $e^{i k n d}$  where  $n = 0, 1, 2$  refer to the increase  $i k d$  in the phase of a wave in going from one scatterer to another and that  $n$  signifies the number of bounces. If one uses the above comments as a guide, all the terms can be explained in a way similar to the explanation, given earlier, of the final expression for the scattered field in the two dimensional case.



- [1] Reiche, F. and Schaefer, C. - Theory of the diffraction grating; *Annal. der Physik*, 35, 817 (1911).
- [2] Twersky, V. - Multiple scattering of radiation by an arbitrary planar configuration of parallel cylinders and by two parallel cylinders; *J. Appl. Phys.*, 23, 407 (1952). See also [11] below.
- [3] Karp, S. - Diffraction by a combination of cylinders; *Proc. McGill Symposium, McGill Univ., Montreal, Canada, June 1953*.
- [4] Karp, S. and Radlow, J. - On resonance in infinite gratings of cylinders. *IRE Trans. on Antennas and Propagation*. AP-4, No. 4, (1956).
- [5] Karp, S. N. - Diffraction by an infinite grating of arbitrary cylinders; *N.Y.U., Inst. Math. Sci., Div. of EM Res., Research Report No. EM-85*, Oct. 1955. See also *Bull. Amer. Phys. Soc., Phys. Rev.*, 86, 586 (1952).
- [6] Karp, S. and Russek, A. - Diffraction by a wide slit; *J. Appl. Phys.*, 27, 886 (1956).
- [7] Zitron, N.R. and Karp, S.N. - Higher order approximations in multiple scattering; *Bull. Amer. Phys. Soc., Series II*, 3, No. 3, 184 (1958).
- [8] Keller, J.B., Lewis, R.M. and Seckler, B.D. - Asymptotic solution of some diffraction problems; *Comm. Pure Appl. Math.*, 9, 207 (1956).
- [9] Stratton, J.A. - *Electromagnetic Theory*, N.Y., McGraw-Hill 1941, p. 372.
- [10] Ibid, p. 374
- [11] Twersky, V. - Multiple scattering of radiation, Part I: Arbitrary configurations of parallel cylinders, planar configurations, two cylinders; *N.Y.U., Inst. Math. Sci., Div. of EM Res., Research Report EM-34*, July 1951.
- [12] Twersky, V. - Certain reflection and transmission coefficients; *J. Appl. Phys.*, 25, 859 (1954).
- [13] Papas, C. H. - Diffraction by a cylindrical obstacle; 21, 318 (1950).
- [14] Sommerfeld, A. - *Partial Differential Equations in Physics*; N.Y., Academic Press, 1949, p.192.



Contract No. AF 19(604)1717

(ONE copy unless otherwise noted)

Commander Air Research and Development Command Andrews Air Force Base Washington 25, D. C. Attn: Major E. Wright, RDTCC	Director Evans Signal Laboratory Belmar, New Jersey Attn: Mr. O. C. Woodyard	(5) Hq. Air Force Cambridge Research Center Laurence G. Hanscom Field Bedford, Mass. Attn: CRRD
Director of Resident Training 3380th Technical Training Group Keesler Air Force Base, Mississippi Attn: OA-3011 Course	U. S. Army Signal Engineering Labs. Evans Signal Laboratory Belmar, New Jersey Attn: Technical Document Center	Director, Avionics Division (AV) Bureau of Aeronautics Department of the Navy Washington 25, D. C.
Director Air University Library Maxwell Air Force Base, Alabama	Massachusetts Institute of Technology Signal Corps Liaison Officer Cambridge 39, Mass. Attn: A. D. Bedrosian, Room 26-131	Chief, Bureau of Ships Department of the Navy Washington 25, D. C. Attn: Mr. E. Johnston, Code 833E
Commander Air Force Missile Test Center Patrick Air Force Base, Florida Attn: MTE - for classified documents Attn: MU-411, Technical Library - for unclassified documents	Commanding General, SIGFM/EL-PC U. S. Army Signal Engineering Labs. Fort Monmouth, New Jersey Attn: Dr. Rorot M. Kedesdy Deputy Chief, Chem-Physics Branch	Commander U. S. Naval Air Missile Test Center Point Mugu, California Attn: Code 366
Tactical Air Group Directorate of Research and Development DCS/D Headquarters, USAF Washington, D. C. Attn: Major R. L. Stell	Commander Army Rocket and Guided Missile Agency Redstone Arsenal, Alabama Attn: Technical Library, ORDXR-OTL	U. S. Naval Ordnance Laboratory Whita Oak Silver Spring 19, Maryland Attn: The Library
Director, Communications and Electronics Hq. U. S. Air Force Washington 25, D. C. Attn: AFAC S/E	Commanding General U. S. Army Signal Engineering Labs. Fort Monmouth, New Jersey Attn: SIGFM/EL-AT	Commander U. S. Naval Ordnance Test Station China Lake, California Attn: Code 753
Commander Wright Air Development Center Wright-Patterson Air Force Base, Ohio Attn: WCLRS-6, Mr. Fortune	Department of the Army Office of the Chief Signal Officer Washington 25, D. C. Attn: SIGRD-7	Librarian U. S. Naval Postgraduate School Monterey, California
Wright Air Development Center Wright-Patterson Air Force Base, Ohio Flight Research Laboratory Research Division Attn: WCRRA	Office of Chief Signal Officer Engineering and Technical Division Washington 25, D. C. Attn: SIGNET-5	Air Force Development Field Representative Naval Research Laboratory Washington 25, D. C. Attn: Code 1072
Commander Wright Air Development Center Wright-Patterson Air Force Base, Ohio Attn: N. Draganjac, WCLNQ-4	Guided Missile Fuze Library Diamond Ordnance Fuze Laboratories Washington 25, D. C. Attn: R. D. Mather, Chief Microwave Development Section	Director U. S. Naval Research Laboratory Washington 25, D. C. Attn: Code 2027
Commander Wright Air Development Center Wright-Patterson Air Force Base, Ohio Attn: Mr. Paul Springer, WCLRE-5	(10) Armed Services Technical Information Agency Arlington Hall Station Arlington 12, Virginia	Dr. J. I. Bohnert, Code 5210 U. S. Naval Research Laboratory Washington 25, D. C. (Unclassified only) Classified to be sent to: Director U. S. Naval Research Laboratory Attn: Code 5200 Washington 25, D. C.
Commander Air Technical Intelligence Center Wright-Patterson Air Force Base, Ohio Attn: AFCIN-4B1a	(2) Library Boulder Laboratories National Bureau of Standards Boulder, Colorado	Commanding Officer and Director U. S. Navy Underwater Sound Laboratory Fort Trumbull, New London, Connecticut
Commander Rome Air Development Center Griffiss Air Force Base, New York Attn: RCSSTL-1	National Bureau of Standards Department of Commerce Washington 25, D. C. Attn: Mr. A. G. McNish	Chief of Naval Research Department of the Navy Washington 25, D. C. Attn: Code 427
Commander Rome Air Development Center Griffiss Air Force Base, New York Attn: Mr. Donald Dakan, RCUE	National Bureau of Standards Department of Commerce Washington 25, D. C. Attn: Gustave Shapiro, Chief Engineering Electronics Section Electricity and Electronics Div.	Commanding Officer and Director U. S. Navy Electronics Laboratory (Library) San Diego 52, California
Commander Rome Air Development Center (ARDC) Griffiss Air Force Base, New York Attn: Dr. John S. Burgess, RCE	(2) Office of Technical Services Department of Commerce Washington 25, D. C. Attn: Technical Reports Section (Unclassified only)	Chief, Bureau of Ordnance Department of the Navy Washington 25, D. C. Attn: Code Ad3
Commander Air Force Missile Development Center Holloman Air Force Base, New Mexico Attn: HDOIL, Technical Library	Director National Security Agency Washington 25, D. C. Attn: R/D (331)	Chief, Bureau of Ordnance Department of the Navy Washington 25, D. C. Attn: Fire Control Branch (ReSL4)
Director U. S. Army Ordnance Ballistic Research Laboratories Aberdeen Proving Ground, Maryland Attn: Ballistic Measurements Laboratory	(2) Hq. Air Force Cambridge Research Center Laurence G. Hanscom Field Bedford, Mass. Attn: CROTLR-2 - P. Condon	Department of the Navy Bureau of Aeronautics Technical Data Division, Code 4106 Washington 25, D. C.
Ballistic Research Laboratories Aberdeen Proving Ground, Maryland Attn: Technical Information Branch	(5) Hq. Air Force Cambridge Research Center Laurence G. Hanscom Field Bedford, Mass. Attn: CROTLR - J. Armstrong	Chief, Bureau of Ships Department of the Navy Washington 25, D. C. Attn: Code 817B

Commanding Officer  
U. S. Naval Air Development Center  
Johnsville, Pennsylvania  
Attn: NADC Library

Commander  
U. S. Naval Air Test Center  
Patuxent River, Maryland  
Attn: ET-315, Antenna Branch

Director  
Naval Ordnance Laboratory  
Corona, California

Commanding Officer  
U. S. Naval Ordnance Laboratory  
Corona, California  
Attn: Mr. W. Horenstein, Division 72

Airborne Instruments Laboratory, Inc.  
160 Old Country Road  
Mineola, New York  
Attn: Dr. E. G. Fubini, Director  
Research and Engineering Division

Aircom, Inc.  
354 Main Street  
Winthrop, Mass.

American Machine and Foundry Company  
Electronics Division  
1085 Commonwealth Avenue  
Boston 15, Mass.  
Attn: Mrs. Rita Moravcsik, Librarian

Andrew Alford, Consulting Engineers  
299 Atlantic Avenue  
Boston 10, Mass.

Avion Division  
ACF Industries, Inc.  
800 No. Pitt Street  
Alexandria, Virginia  
Attn: Library

Battelle Memorial Institute  
505 King Avenue  
Attn: Wayne E. Rife, Project Leader  
Electrical Engineering Division  
Columbus 1, Ohio

Bell Aircraft Corporation  
Post Office Box One  
Buffalo 5, New York  
Attn: Eunice P. Hazelton, Librarian

Bell Telephone Laboratories, Inc.  
Whippany Laboratory  
Whippany, New Jersey  
Attn: Technical Information Library

Pacific Division  
Bendix Aviation Corporation  
11600 Sherman Way  
North Hollywood, California  
Engineering Library  
Attn: Peggie Robinson, Librarian

Bendix Radio Division  
Bendix Aviation Corp.  
E. Joppa Road  
Towson 4, Maryland  
Attn: Dr. D. M. Allison, Jr.  
Director Engineering and Research

Boeing Airplane Company  
Pilotless Aircraft Division  
P.O. Box 3707  
Seattle 24, Washington  
Attn: R.P. Barber, Library Supervisor

Boeing Airplane Company  
Wichita Division Engineering Library  
Wichita 1, Kansas  
Attn: Kenneth C. Knight, Librarian

Boeing Airplane Company  
Seattle Division  
Seattle 14, Washington  
Attn: E.T. Allen, Library Supervisor

Bjorksten Research Labs, Inc.  
P. O. Box 265  
Madison, Wisconsin  
Attn: Mrs. Fern B. Korsgard

Convair, A Division of General Dynamics  
Corp.  
Fort Worth, Texas  
Attn: K.G. Brown, Division Research  
Librarian

Convair, A Division of General Dynamics  
Corp.  
San Diego 12, California  
Attn: Mrs. Dora B. Burke,  
Engineering Librarian

Cornell Aeronautical Laboratory, Inc.  
4455 Genesee Street  
Buffalo 21, New York  
Attn: Librarian

Dalmo Victor Company  
A Division of Textron, Inc.  
1515 Industrial Way  
Belmont, California  
Attn: Mary Ellen Addems,  
Technical Librarian

Dorne and Margolin, Inc.  
29 New York Avenue  
Westbury, Long Island, N. Y.

Douglas Aircraft Company, Inc.  
P.O. Box 200  
Long Beach 1, California  
Attn: Engineering Library (C-250)

Douglas Aircraft Co., Inc.  
827 Lapham Street  
El Segundo, California  
Attn: Engineering Library

Douglas Aircraft Company, Inc.  
3000 Ocean Park Boulevard  
Santa Monica, California  
Attn: P.T. Cline  
Eq. Sec. Reference Files,  
Eq. Eng. A250

Douglas Aircraft Company, Inc.  
2000 North Memorial Drive  
Tulsa, Oklahoma  
Attn: Engineering Library, D-250

Electronics Communication, Inc.  
1830 York Road  
Timonium, Maryland

Emerson and Cuming, Inc.  
869 Washington Street  
Canton, Mass.  
Attn: Mr. W. Cuming

Emerson Electric Mfg. Co.  
8100 West Florissant Avenue  
St. Louis 21, Missouri  
Attn: Mr. E.R. Breslin, Librarian

Sylvania Elec. Prod. Inc.  
Electronic Defense Laboratory  
P.O. Box 205 - (Uncl)  
Mountain View, California  
Attn: Library

Fairchild Aircraft Division  
Fairchild Eng. and Airplane Corp.  
Hagerstown, Maryland  
Attn: Library

Farnsworth Electronics Company  
3700 East Pontiac Street  
Fort Wayne 1, Indiana  
Attn: Technical Library

Federal Telecommunication Labs.  
500 Washington Avenue  
Nutley 10, New Jersey  
Attn: Technical Library

The Gabriel Electronics  
Division of the Gabriel Company  
135 Crescent Road  
Needham Heights 94, Mass.  
Attn: Mr. Steven Galagan

General Electric Advanced Electronics Center  
Cornell University  
Ithaca, New York  
Attn: J. B. Travis

General Electric Company  
Electronics Park  
Syracuse, New York  
Attn: Documents Library, B. Fletcher  
Building 3-143A

General Precision Laboratory, Inc.  
63 Bedford Road  
Pleasantville, New York  
Attn: Mrs. Mary G. Herbst, Librarian

Goodyear Aircraft Corp.  
1210 Maseillon Road  
Akron 15, Ohio  
Attn: Library D/120 Plant A

Granger Associates  
Electronic Systems  
966 Commercial Street  
Palo Alto, California  
Attn: John V. N. Granger, President

Grumman Aircraft Engineering Corporation  
Bethpage, Long Island, N. Y.  
Attn: Mrs. A. M. Gray, Librarian  
Engineering Library, Plant No. 5

The Hallicrafters Company  
4401 West 5th Avenue  
Chicago 24, Illinois  
Attn: LaVerne LaGicia, Librarian

Hoffman Laboratories, Inc.  
3761 South Hill Street  
Los Angeles 7, California  
Attn: Engineering Library

Hughes Aircraft Company  
Antenna Department  
Microwave Laboratory  
Building 12, Room 2617  
Culver City, California  
Attn: M. D. Adcock  
  
Hughes Aircraft Company  
Florence and Teale Streets  
Culver City, California  
Attn: Dr. L.C. Van Atta, Associate Director  
Research Labs.

Hycon Eastern, Inc.  
75 Cambridge Parkway  
Cambridge, Mass.  
Attn: Mrs. Lois Seulowitz  
Technical Librarian

International Business Machines Corp.  
Military Products Division  
590 Madison Avenue  
New York 33, New York  
Attn: Mr. C.F. McElwain, General Manager

International Business Machines Corp.  
Military Products Division  
Owego, New York  
Attn: Mr. D. I. Marr, Librarian  
Department 459

International Resistance Company  
401 N. Broad Street  
Philadelphia 8, Pa.  
Attn: Research Library

Jansky and Bailey, Inc.  
1339 Wisconsin Avenue, N. W.  
Washington 7, D. C.  
Attn: Mr. Delmer C. Porta

Dr. Henry Jasik, Consulting Engineer  
298 Shames Drive  
Brush Hollow Industrial Park  
Westbury, New York

Electromagnetic Research Corporation  
711 14th Street, N. W.  
Washington 5, D. C.

Lockheed Aircraft Corporation  
2555 N. Hollywood Way  
California Division Engineering Library  
Department 72-75, Plant A-1, Bldg. 63-1  
Burbank, California  
Attn: N. C. Harnois

The Martin Company  
P. O. Box 179  
Denver 1, Colorado  
Attn: Mr. Jack McCormick

The Glenn L. Martin Company  
Baltimore 3, Maryland  
Attn: Engineering Library  
Antenna Design Group

Maryland Electronic Manufacturing Corp.  
5009 Calvert Road  
College Park, Maryland  
Attn: Mr. H. Warren Cooper

Mathematical Reviews  
190 Hope Street  
Providence 6, Rhode Island

The W. L. Maxson Corporation  
460 West 34th Street  
New York, N. Y.  
Attn: Miss Dorothy Clark

McDonnell Aircraft Corporation  
Lambert Saint-Louis Municipal Airport  
Box 516, St. Louis 3, Missouri  
Attn: R. D. Detrich, Engineering Library

McMillan Laboratory, Inc.  
Brownville Avenue  
Ipswich, Massachusetts  
Attn: Security Officer, Document Room

Melpar, Inc.  
3000 Arlington Boulevard  
Falls Church, Virginia  
Attn: Engineering Technical Library

Microwave Development Laboratory  
90 Broad Street  
Babson Park 57, Massachusetts  
Attn: N. Tucker, General Manager

Microwave Radiation Company Inc.  
1923 South Hamilton Street  
Gardena, California  
Attn: Mr. Morris J. Ehrlich, President

Chance Vought Aircraft, Inc.  
9314 West Jefferson Street  
Dallas, Texas  
Attn: Mr. H. S. White, Librarian

Northrop Aircraft, Inc.  
Hawthorne, California  
Attn: Mr. E. A. Freitas, Library Dept 3145  
1001 E. Broadway

Remington Rand Univ. - Division of Sperry  
Rand Corporation  
1900 West Allegheny Avenue  
Philadelphia 29, Pennsylvania  
Attn: Mr. John F. McCarthy  
R and D Sales and Contracts

North American Aviation, Inc.  
12214 Lakewood Boulevard  
Downey, California  
Attn: Engineering Library 495-115

North American Aviation, Inc.  
Los Angeles International Airport  
Los Angeles 45, California  
Attn: Engineering Technical File

Page Communications Engineers, Inc.  
710 Fourteenth Street, Northwest  
Washington 5, D. C.  
Attn: Librarian

Philco Corporation Research Division  
Branch Library  
4700 Wissachickon Avenue  
Philadelphia 44, Pa.  
Attn: Mrs. Dorothy S. Collins

Pickard and Burns, Inc.  
240 Highland Avenue  
Needham 94, Mass.  
Attn: Dr. J. T. DeBettencourt

Polytechnic Research and Development  
Company, Inc.  
202 Tillary Street  
Brooklyn 1, New York  
Attn: Technical Library

Radiation Engineering Laboratory  
Main Street  
Maynard, Mass.  
Attn: Dr. John Ruze

Radiation, Inc.  
P. O. Drawer 37  
Melbourne, Florida  
Attn: Technical Library, Mr. M.L. Cox

Radio Corp. of America  
RCA Laboratories  
Rocky Point, New York  
Attn: P. S. Carter, Lab. Library

RCA Laboratories  
David Sarnoff Research Center  
Princeton, New Jersey  
Attn: Miss Fern Cloak, Librarian  
Research Library

Radio Corporation of America  
Defense Electronic Products  
Building 10, Floor 7  
Camden 2, New Jersey  
Attn: Mr. Harold J. Schrader  
Staff Engineer, Organization  
of Chief Technical  
Administrator

(2) The Ramo-Wooldridge Corporation  
P.O. Box 45453 Airport Station  
Los Angeles 45, California  
Attn: Margaret C. Whitnah,  
Chief Librarian

Hoover Microwave Co.  
9592 Baltimore Avenue  
College Park, Maryland

Director, USAF Project RAND  
Via: Air Force Liaison Office  
The Rand Corporation  
1700 Main Street  
Santa Monica, California

Rantec Corporation  
Calabasas, California  
Attn: Grace Keener, Office Manager

Raytheon Manufacturing Company  
Missile Systems Division  
Bedford, Mass.  
Attn: Mr. Irving Goldstein

Raytheon Manufacturing Company  
Wayland Laboratory, State Road  
Wayland, Mass.  
Attn: Mr. Robert Borts

Raytheon Manufacturing Company  
Wayland Laboratory  
Wayland, Mass.  
Attn: Miss Alice G. Anderson,  
Librarian

Republic Aviation Corporation  
Farmingdale, Long Island, N. Y.  
Attn: Engineering Library

Thru: Air Force Plant Representative  
Republic Aviation Corp.  
Farmingdale, Long Island, N.Y.

Rheem Manufacturing Company  
9236 East Hall Road  
Downey, California  
Attn: J. C. Joerger

Trans-Tech, Inc.  
P. O. Box 346  
Frederick, Maryland

Ryan Aeronautical Company  
Lindbergh Field  
San Diego 12, California  
Attn: Library - unclassified

Sage Laboratories  
159 Linden Street  
Wellesley 81, Mass.

Sanders Associates  
95 Canal Street  
Nashua, New Hampshire  
Attn: N. R. Wild, Library

Sandia Corporation, Sandia Base  
P.O. Box 5800, Albuquerque, New Mexico  
Attn: Classified Document Division

Sperry Gyroscopic Company  
Great Neck, Long Island, New York  
Attn: Florence W. Turnbull, Engr. Librarian

Stanford Research Institute  
Menlo Park, California  
Attn: Library, Engineering Division

Sylvania Electric Products, Inc.  
100 First Avenue  
Waltham 54, Mass.  
Attn: Charles A. Thornhill, Report Librarian  
Waltham Laboratories Library

Systems Laboratories Corporation  
14852 Ventura Boulevard  
Sherman Oaks, California  
Attn: Donald L. Margerum

TRG, Inc.  
17 Union Square West  
New York 3, N. Y.  
Attn: M. L. Henderson, Librarian

A. S. Thomas, Inc.  
161 Devonshire Street  
Boston 10, Mass.  
Attn: A. S. Thomas, President

Bell Telephone Laboratories  
Murray Hill  
New Jersey

Chu Associates  
P. O. Box 387  
Whitcomb Avenue  
Littleton, Mass.

Microwave Associates, Inc.  
Burlington, Mass.

Raytheon Manufacturing Company  
Missile Division  
Hartwell Road  
Bedford, Mass.

Radio Corporation of America  
Aviation Systems Laboratory  
225 Crescent Street  
Waltham, Mass.

Lockheed Aircraft Corporation  
Missile Systems Division Research Library  
Box 504, Sunnyvale, California  
Attn: Miss Eva Lou Robertson,  
Chief Librarian

The Rand Corporation  
1700 Main Street  
Santa Monica, California  
Attn: Dr. W. C. Hoffman

Commander  
AF Office of Scientific Research  
Air Research and Development Command  
14th Street and Constitution Avenue  
Washington, D. C.  
Attn: Mr. Otting, SRY

Westinghouse Electric Corp.  
Electronics Division  
Friendship Int'l Airport Box 746  
Baltimore 3, Maryland  
Attn: Engineering Library



Wheeler Laboratories, Inc.  
122 Cutter Mill Road  
Great Neck, New York  
Attn: Mr. Harold A. Wheeler

Zenith Plastics Co.  
Box 91  
Gardena, California  
Attn: Mr. S. S. Olesky

Library Geophysical Institute  
of the University of Alaska  
College  
Alaska

University of California  
Berkeley 4, California  
Attn: Dr. Samuel Silver,  
Prof. Engineering Science  
Division of Elec. Eng. Electronics  
Research Lab.

University of California  
Electronics Research Lab.  
332 Corv Hall  
Berkeley 4, California  
Attn: J. R. Whinnery

California Institute of Technology  
Jet Propulsion Laboratory  
4800 Oak Grove Drive  
Pasadena, California  
Attn: Mr. I. E. Newlen

California Institute of Technology  
1201 E. California Street  
Pasadena, California  
Attn: Dr. C. Papas

Carnegie Institute of Technology,  
Schenley Park  
Pittsburgh 13, Pennsylvania  
Attn: Prof. A. E. Heins

Cornell University  
School of Electrical Engineering  
Ithaca, New York  
Attn: Prof. G. C. Dalman

University of Florida  
Department of Electrical Engineering  
Gainesville, Florida  
Attn: Prof. M. H. Latour, Library

Library  
Georgia Institute of Technology  
Engineering Experiment Station  
Atlanta, Georgia  
Attn: Mrs. J.H. Crosland, Librarian

Harvard University  
Technical Reports Collection  
Gordon McKay Library, 303A Pierce Hall  
Oxford Street, Cambridge 38, Mass.  
Attn: Mrs. E.L. Hufschmidt, Librarian

Harvard College Observatory  
60 Garden Street  
Cambridge 39, Mass.  
Attn: Dr. Fred L. Whipple

University of Illinois  
Documents Division Library  
Urbana, Illinois

University of Illinois  
College of Engineering  
Urbana, Illinois  
Attn: Dr. P. E. Moyes, Department of  
Electrical Engineering

The Johns Hopkins University  
Homewood Campus  
Department of Physics  
Baltimore 18, Maryland  
Attn: Dr. Donald E. Kerr

Sandia Corporation  
Attn: Organization 1423  
Sandia Base  
Albuquerque, New Mexico

Applied Physics Laboratory  
The Johns Hopkins University  
8621 Georgia Avenue  
Silver Spring, Maryland  
Attn: Mr. George L. Seielstad

Massachusetts Institute of Technology  
Research Laboratory of Electronics  
Room 20B-221  
Cambridge 39, Massachusetts  
Attn: John H. Hewitt

Massachusetts Institute of Technology  
Lincoln Laboratory  
P. O. Box 73  
Lexington 73, Mass.  
Attn: Document Room A-229

University of Michigan  
Electronic Defense Group  
Engineering Research Institute  
Ann Arbor, Michigan  
Attn: J. A. Boyd, Supervisor

University of Michigan  
Engineering Research Institute  
Radiation Laboratory  
Attn: Prof. K. M. Siegel  
912 N. Main St.,  
Ann Arbor, Michigan

University of Michigan  
Engineering Research Institute  
Willow Run Laboratories  
Willow Run Airport  
Ypsilanti, Michigan  
Attn: Librarian

University of Minnesota  
Minneapolis 14, Minnesota  
Attn: Mr. Robert H. Stumm, Library

Northwestern University  
Microwave Laboratories  
Evanston, Illinois  
Attn: R. E. Beam

Ohio State University Research Found.  
Ohio State University  
Columbus 10, Ohio  
Attn: Dr. T.E. Tice  
Dept. of Elec. Engineering

The University of Oklahoma  
Research Institute  
Norman, Oklahoma  
Attn: Prof. C. L. Farrar, Chairman  
Electrical Engineering

Polytechnic Institute of Brooklyn  
Microwave Research Institute  
55 Johnson Street  
Brooklyn, New York  
Attn: Dr. Arthur A. Oliner

Polytechnic Institute of Brooklyn  
Microwave Research Institute  
55 Johnson Street  
Brooklyn, New York  
Attn: Mr. A. E. Laemmel

Syracuse University Research Institute  
Cortland Campus  
Syracuse 10, New York  
Attn: Dr. C. S. Grove, Jr.  
Director of Engineering Research

The University of Texas  
Elec. Engineering Research Laboratory  
P. O. Box 8026, University Station  
Austin 12, Texas  
Attn: Mr. John R. Gerhardt  
Assistant Director

The University of Texas  
Defense Research Laboratory  
Austin, Texas  
Attn: Claude W. Horton, Physics Library

University of Toronto  
Department of Electrical Engineering  
Toronto, Canada  
Attn: Prof. G. Sinclair

Lowell Technological Institute  
Research Foundation  
P. O. Box 709, Lowell, Mass.  
Attn: Dr. Charles R. Mings

University of Washington  
Department of Electrical Engineering  
Seattle 5, Washington  
Attn: G. Held, Associate Professor

Stanford University  
Stanford, California  
Attn: Dr. Chodorow  
Microwave Laboratory

Physical Science Laboratory  
New Mexico College of Agriculture  
and Mechanic Arts  
State College, New Mexico  
Attn: Mr. H. W. Haas

Brown University  
Department of Electrical Engineering  
Providence, Rhode Island  
Attn: Dr. C. M. Angulo

Case Institute of Technology  
Cleveland, Ohio  
Attn: Prof. S. Seeley

Columbia University  
Department of Electrical Engineering  
Morningside Heights  
New York, N. Y.  
Attn: Dr. Schlesinger

McGill University  
Montreal, Canada  
Attn: Prof. O. A. Wootton  
Director, The Eaton Electronics  
Research Lab.

Purdue University  
Department of Electrical Engineering  
Lafayette, Indiana  
Attn: Dr. Schultz

The Pennsylvania State University  
Department of Electrical Engineering  
University Park, Pennsylvania

University of Pennsylvania  
Institute of Cooperative Research  
3400 Walnut Street  
Philadelphia, Pennsylvania  
Attn: Dept. of Electrical Engineering

University of Tennessee  
Ferris Hall  
W. Cumberland Avenue  
Knoxville 16, Tennessee

University of Wisconsin  
Department of Electrical Engineering  
Madison, Wisconsin  
Attn: Dr. Scheibe

University of Seattle  
Department of Electrical Engineering  
Seattle, Washington  
Attn: Dr. D. K. Reynolds

Wayne University  
Detroit, Michigan  
Attn: Prof. A. F. Stevenson

Electronics Research Laboratory  
Illinois Institute of Technology  
3300 So. Federal Street  
Chicago 16, Illinois  
Attn: Dr. Lester C. Peach  
Research Engineer

Advisory Group on Electronic Parts  
Room 103  
Moore School Building  
200 South 33rd Street  
Philadelphia 4, Pennsylvania

Ionosphere Research Laboratory  
Pennsylvania State College  
State College, Pennsylvania  
ATTN: Professor A. H. Waynick, Director

Institute of Mathematical Sciences  
25 Waverly Place  
New York 3, New York  
ATTN: Librarian

Electronics Division  
Rand Corporation  
1700 Main Street  
Santa Monica, California  
ATTN: Dr. Robert Kalaba

National Bureau of Standards  
Washington, D. C.  
ATTN: Dr. W. K. Saunders

Applied Mathematics and Statistics Lab.  
Stanford University  
Stanford, California  
ATTN: Dr. Albert H. Bowker

Department of Physics and Astronomy  
Michigan State College  
East Lansing, Michigan  
ATTN: Dr. A. Leitner

University of Tennessee  
Knoxville, Tennessee  
ATTN: Dr. Fred A. Picken

Lebanon Valley College  
Annville, Pennsylvania  
ATTN: Professor B.H. Bissinger

General Atomic  
P. O. Box 608  
San Diego 12, California  
Attn: Dr. Edward Gerjuoy

Department of Physics  
Amherst College  
Amherst, Mass.  
ATTN: Dr. Arnold Arons

California Institute of Technology  
1201 E. California Street  
Pasadena, California  
ATTN: Dr. A. Erdelyi

Mathematics Department  
Stanford University  
Stanford, California  
ATTN: Dr. Harold Levine

University of Minnesota  
Minneapolis 14, Minnesota  
ATTN: Professor Paul C. Rosenbloom

Department of Mathematics  
Stanford University  
Stanford, California  
ATTN: Professor Bernard Epstein

Applied Physics Laboratory  
The Johns Hopkins University  
8621 Georgia Avenue  
Silver Spring, Maryland  
ATTN: Dr. B. S. Gourary

(2) Exchange and Gift Division  
The Library of Congress  
Washington 25, D. C.

Electrical Engineering Department  
Massachusetts Institute of Technology  
Cambridge 39, Mass.  
ATTN: Dr. L. J. Chu

Nuclear Development Associates, Inc.  
5 New Street  
White Plains, New York  
ATTN: Library

California Institute of Technology  
Electrical Engineering  
Pasadena, California  
ATTN: Dr. Zohrab A. Kaprielian

Dr. Rodman Doll  
311 W. Cross Street  
Ypsilanti, Michigan

California Inst. of Technology  
Pasadena, California  
ATTN: Mr. Calvin Wilcox

(3) Mr. Robert Brockhurst  
Woods Hole Oceanographic Institute  
Woods Hole, Mass.

National Bureau of Standards  
Boulder, Colorado  
ATTN: Dr. R. Gallet

Dr. Solomon L. Schwebel  
3689 Louis Road  
Palo Alto, California

University of Minnesota  
The University of Library  
Minneapolis 14, Minnesota  
ATTN: Exchange Division

Department of Mathematics  
University of California  
Berkeley, California  
ATTN: Professor Bernard Friedman

Lincoln Laboratory  
Massachusetts Institute of Technology  
P. O. Box 73  
Lexington 73, Massachusetts  
ATTN: Dr. Shou Chin Wang, Room C-351

Melpar, Inc.,  
3000 Arlington Boulevard  
Falls Church, Virginia  
ATTN: Mr. K. S. Kelleher, Section Head

Hq. Air Force Cambridge Research Center  
Laurence G. Hanscom Field  
Bedford, Mass.  
ATTN: Mr. Francis J. Zucker, CRRD

Hq. Air Force Cambridge Research Center  
Laurence G. Hanscom Field  
Bedford, Mass.  
ATTN: Dr. Philip Newman, CRRK

Mr. N. C. Gerson  
Trapelo Road  
South Lincoln, Mass.

Dr. Richard B. Barrar  
Systems Development Corp.  
2400 Colorado Avenue  
Santa Monica, California

Columbia University Hudson Laboratories  
P.O. Box 239  
145 Palisade Street, Dobbs Ferry, N. Y.  
ATTN: Dr. N. W. Johnson

Institute of Fluid Dynamics  
and Applied Mathematics  
University of Maryland  
College Park, Maryland  
ATTN: Dr. Elliott Montrell

Department of Electrical Engineering  
Washington University  
Saint Louis 5, Mo.  
ATTN: Professor J. Van Bladel

Department of the Navy  
Office of Naval Research Branch Office  
1030 E. Green Street  
Pasadena 1, California

Brandeis University  
Waltham, Mass.  
ATTN: Library

General Electric Company  
Microwave Laboratory  
Electronics Division  
Stanford Industrial Park  
Palo Alto, California  
ATTN: Library

Smyth Research Associates  
3555 Aero Court  
San Diego 3, California  
ATTN: Dr. John B. Smyth

Electrical Engineering  
California Institute of Technology  
Pasadena, California  
ATTN: Dr. Georges G. Weill

Naval Research Laboratory  
Washington 25, D. C.  
ATTN: Henry J. Passerini, Code 5278A

Dr. George Kear  
5 Culver Court  
Orinda, California

Brooklyn Polytechnic  
85 Livingston Street  
Brooklyn, New York  
ATTN: Dr. Nathan Marcuvitz

Department of Electrical Engineering  
Brooklyn Polytechnic  
85 Livingston Street  
Brooklyn, New York  
ATTN: Dr. Jerry Shmoys

Department of Mathematics  
University of New Mexico  
Albuquerque, New Mexico  
ATTN: Dr. I. Kolodner

Mathematics Department  
Polytechnic Institute of Brooklyn  
Johnson and Jay Street  
Brooklyn, New York  
ATTN: Dr. Harry Hochstadt

Ballistics Research Laboratory  
Aberdeen Proving Grounds  
Aberdeen, Maryland  
ATTN: Dr. Pullen Keats

Dr. Lester Kraus  
4935 Whitehaven Way  
San Diego, California

University of Minnesota  
Institute of Technology  
Minneapolis, Minnesota  
Attn: Dean Athelston Spilhaus

Ohio State University  
Columbus, Ohio  
Attn: Prof. C. T. Tai  
Department of Electrical Eng.

Naval Research Laboratories  
Washington 25, D. C.  
Attn: W. S. Ament, Code 5271

Naval Research Laboratory  
Washington 25, D. C.  
Attn: Dr. Leslie G. McCracken, Jr.  
Code 3933A

Office of Naval Research  
Department of the Navy  
Attn: Geophysics Branch, Code 416  
Washington 25, D. C.

Office of Chief Signal Officer  
Signal Plans and Operations Division  
Attn: SIGOL-2, Room 20  
Com. Liaison Br., Radio Prop. Sect.  
The Pentagon, Washington 25, D. C.

Defence Research Member  
Canadian Joint Staff  
2001 Connecticut Street  
Washington, D. C.

Central Radio Prop. Lab.  
National Bureau of Standards  
Attn: Technical Reports Library  
Boulder, Colorado

U. S. Weather Bureau  
U. S. Department of Commerce  
Washington 25, D. C.  
Attn: Dr. Harry Wexler

Federal Communications Commission  
Washington 25, D. C.  
Attn: Mrs. Barbara C. Grimes, Librarian

Upper Atmosphere Research Section  
Central Radio Propagation Laboratory  
National Bureau of Standards  
Boulder, Colorado

Argonne National Laboratory  
P.O. Box 299  
Lemont, Illinois  
Attn: Dr. Hoylande D. Young

Bell Telephone Labs.  
Murray Hill, New Jersey  
Attn: Dr. S. O. Rice, 3B - 203

Carnegie Institute of Washington  
Dept. of Terrestrial Magnetism  
5241 Broad Branch Road, N. W.  
Washington 15, D. C.  
Attn: Library

Georgia Tech Research Institute  
225 N. Avenue, N. W.  
Attn: Dr. James E. Boyd  
Atlanta, Georgia

University of Maryland  
College Park, Maryland  
Attn: Dr. A. Weinstein  
Institute of Fluid Dynamics

Massachusetts Institute of Technology  
Lincoln Laboratory  
P. O. Box 73  
Lexington 73, Massachusetts  
Attn: Prof. Radford, Division 3 Head

Willow Run Research Center  
University of Michigan  
Willow Run Airport  
Ypsilanti, Michigan  
Attn: Dr. C. L. Dolph

School of Engineering  
New York University  
University Heights  
New York, New York

Shell Fellowship Committee of the  
Shell Companies Foundation, Inc.  
50 West 50th Street  
New York 20, N. Y.  
Attn: Mr. J. R. Janssen

Esso Research and Engineering Co.  
P. O. Box 51  
Linden, New Jersey  
Attn: Mr. C. L. Brown, Manager

Union Carbide and Carbon Corp.  
30 E. 42nd Street  
New York 17, New York  
Attn: Mr. L. E. Erlanson

Convair  
San Diego 12, California  
Attn: Mr. Marvin Stern

Bell Telephone Labs., Inc.  
463 West Street  
New York 13, N. Y.  
Attn: Dr. Mervin J. Kelly

Engineering Library  
University of California  
405 Hilgard Avenue  
Los Angeles 24, California

Convair, A Division of General Dynamics Corp.  
Daingerfield, Texas  
Attn: J. E. Arnold, Division Manager

Convair, A Division of General Dynamics Corp.  
San Diego 12, California  
Attn: R. L. Bayless, Chief Engineer

Convair, a Division of General Dynamics Corp.  
San Diego 12, California  
Attn: K. J. Bossart, Chief Engineer-WS107A

Convair, A Div. of General Dynamics  
Corp.  
Fort Worth 1, Texas  
Attn: F. W. Davis, Chief Engineer

Convair, A Div. of General Dynamics  
Corp.  
Pomona, California  
Attn: C. D. Parrine  
Ass't Div. Manager, Engin.

Shell Development Company  
Exploration and Production Res. Div.  
3737 Bollaire Boulevard  
Houston 25, Texas  
Attn: Miss Aphrodite Mamoulides

RCA Laboratories  
Princeton, New Jersey  
Attn: Dr. Charles Folk

Stanford Research Institute  
S. Pasadena, California  
Attn: Dr. J. Brandstetten

Wayne State University  
Kresge-Hooker Science Library  
5250 Second Boulevard  
Detroit 2, Michigan

ARRA  
1 Bond Street  
Westbury, L. I., New York  
Attn: Dr. Norman Spector

Varian Associates  
611 Hansen Way  
Palo Alto, California  
Attn: Mrs. Perry Conway  
Technical Librarian

Case Institute of Technology  
Department of Electrical Engin.  
University Circle  
Cleveland 6, Ohio  
Attn: Prof. Robert Plonsey

Dr. Ming S. Wong, CRRP  
Air Force Cambridge Research Center  
Laurence G. Hanscom Field  
Bedford, Massachusetts

Physics Section  
AVCO-RAD Division  
20 South Union Street  
Lawrence, Mass.  
Attn: Dr. Ernest Bauer

Advanced Development Section  
Western Development Labs.  
Philco Corp.  
3875 Fabian Way  
Palo Alto, California  
Attn: Dr. Albert R. Giddis

Department of Aeronautical Engineering  
University of Michigan  
Ann Arbor, Michigan  
Attn: Prof. Mahinder Uberoi

Gordon McKay Laboratory  
Harvard University  
Cambridge 39, Mass.  
Attn: Dr. S. R. Seshadri

Commander  
Air Research and Development Command  
Attn: RDTR  
Andrews Air Force Base  
Washington 25, D. C.

College of Engineering  
Dept. of Electrical Engineering  
University of Florida  
Gainesville, Florida  
Attn: Dr. Sullivan

Dr. V. M. Papadopoulos  
Dept. of Engineering  
Brown University  
Providence, R. I.

Major Vernon Lee Dawson  
RSDD-OML(MO)  
Redstone Arsenal  
Huntsville, Alabama

Grumman Aircraft Engineering Corp.  
South Oyster Bay Road  
Bethpage, Long Island, N. Y.  
Attn: Dr. Charles Mack

AF Office of Scientific Research  
Washington 25, D. C.  
Attn: Dr. Karl Kaplan

University of California  
Radiation Laboratory  
P. O. Box 808  
Livermore, California  
Attn: Dr. Bernard A. Lippmann

Department of Electrical Engineering  
Case Institute of Technology  
University Circle  
Cleveland 6, Ohio  
Attn: Professor Albert E. Collin

Antenna Laboratory  
Air Force Cambridge Research Center  
Laurence G. Hanscom Field  
Bedford, Massachusetts  
Attn: Mr. Philip Blackstone

Lt. Mark J. Beran, CRRD  
Air Force Cambridge Research Center  
Laurence G. Hanscom Field  
Bedford, Massachusetts

Mr. Richard Mack, CRRD  
Air Force Cambridge Research Center  
Laurence G. Hanscom Field  
Bedford, Massachusetts

System Development Corporation  
2500 Colorado Avenue  
Santa Monica, California  
Attn: Library





NYU  
EM-  
126 Zitron, N. & Karp, S. N.  
Higher order approximations in  
multiple scattering...

NYU  
EM-  
126 Zitron, N. & Karp, S.N.  
AUTHOR  
Higher order approximations  
TITLE  
in multiple scattering...

DATE DUE	BORROWER'S NAME	COM NUMBER
JUN 26 '61	H. Zitrone	1100
JUN 2 '64	S. Kamma	
JUN 2 '64	R. A. L. L.	
SEP 1	97	

N. Y. U. Institute of  
Mathematical Sciences  
25 Waverly Place  
New York 3, N. Y.

